




*SmartFloors was created from a desire to combine all the properties of our highly functional products in a single brand, without sacrificing quality and strong visual appeal.*

*Evolving technical flooring without sacrificing beauty.*




*Our SmartCore technical flooring are the breakthrough products. A line that will give you the aesthetics of a wooden floor and the functionality of a high quality technical floor: which is sound-absorbent, resistant to water, impacts and wear, and much more!*

*With three unique solutions, SmartCore is designed to meet a range of requirements, adapting to the characteristics of any setting. Uniting beauty and performance.*




SV260

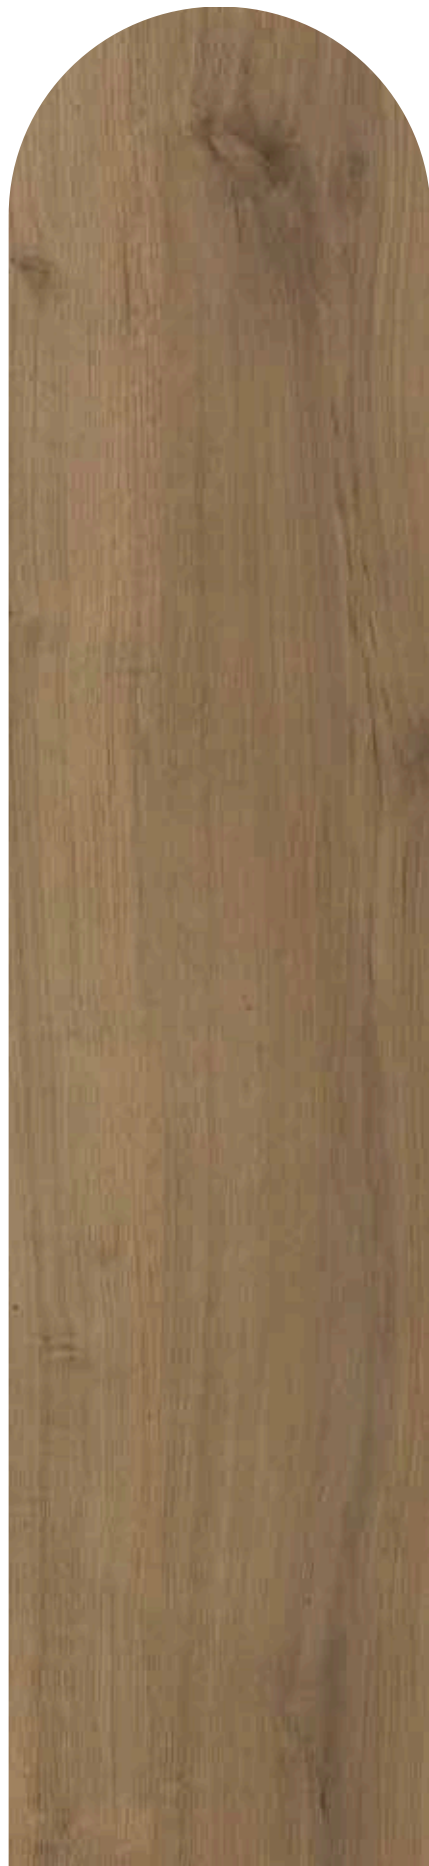

SV262



SV263

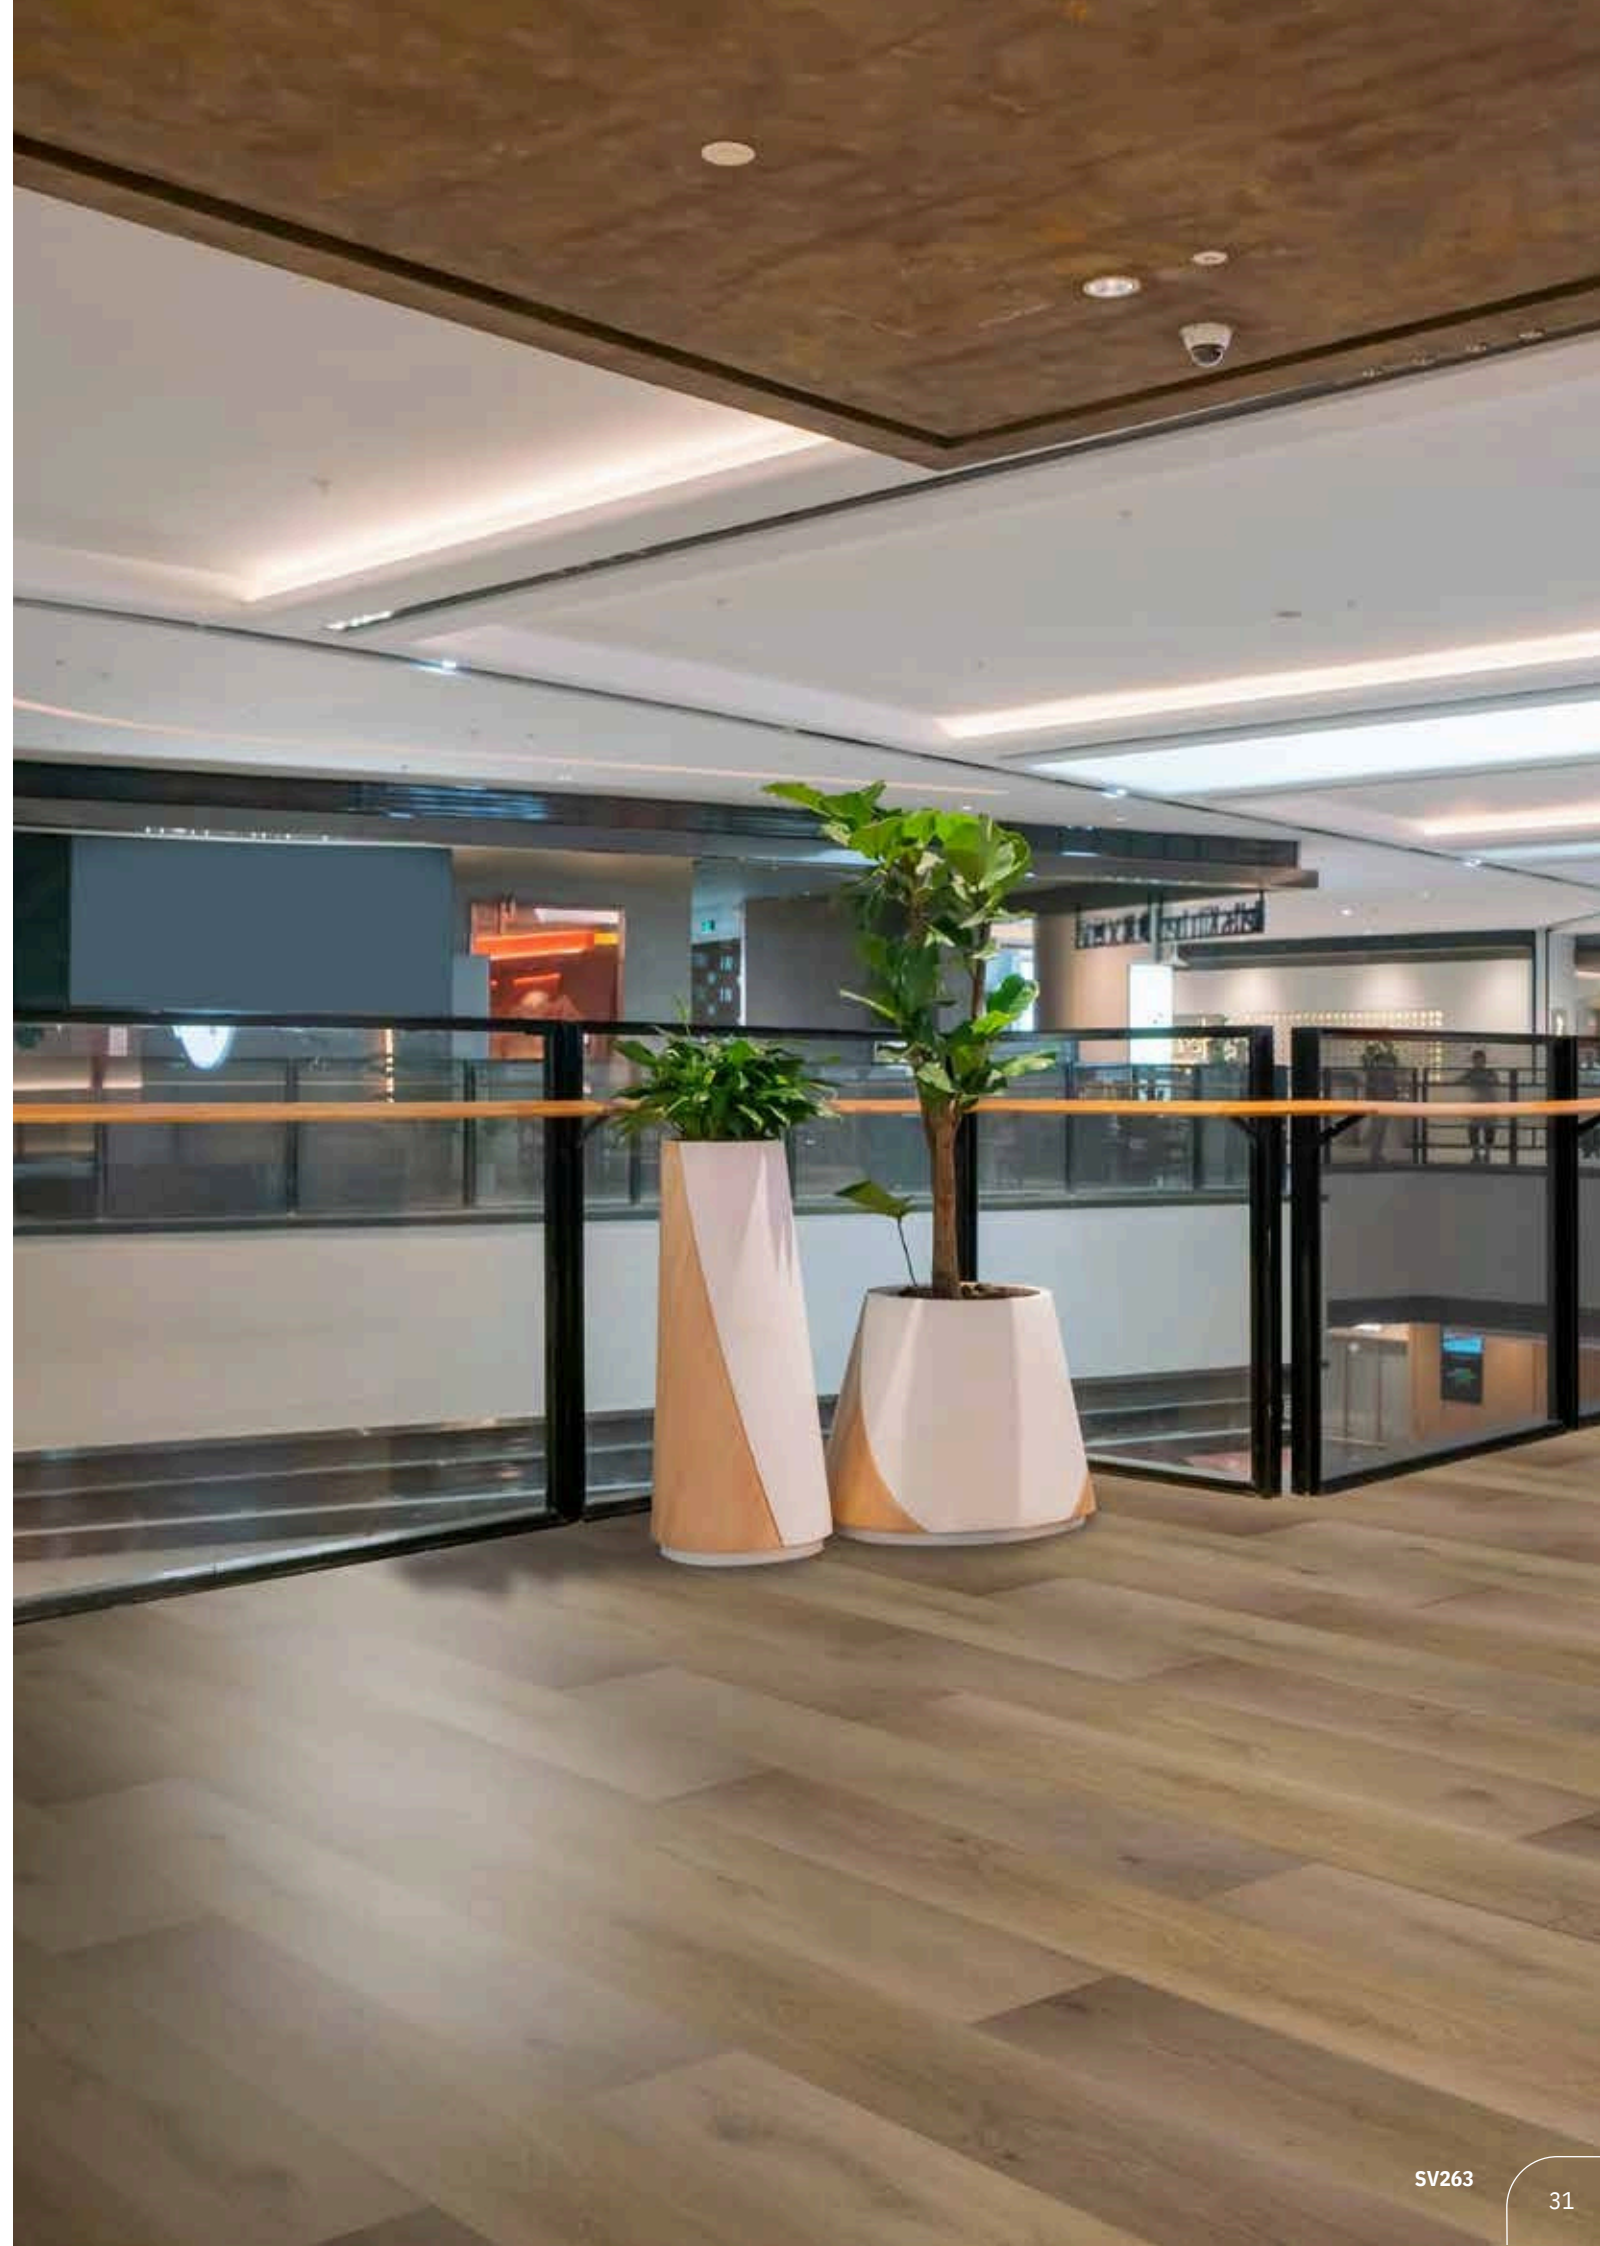



# SV2

LVT

SV260

SPESSORE <b>THICKNESS</b>	2,5 mm
RESISTENZA ALL'USURA <b>WEAR RESISTANCE</b>	Cl. 23, 33 e 42
MATERASSINO <b>UNDERLAY</b>	Non incluso <b>Not included</b>
DIMENSIONI <b>DIMENSIONS</b>	2,5(0,55)x228x1524mm
BISELLATURA <b>BEVEL</b>	Nano 4V
INCASTRO <b>INSTALLATION</b>	Senza incastro <b>Without interlocking</b>
RISCALDAMENTO A PAVIMENTO <b>INSTALLATION ON FLOOR HEATING</b>	Adatto <b>Suitable</b>

Accessori disponibili a pag. 86  
**Accessories available at page 86**

<b>IMBALLO PACKAGING</b>	KG/M2 - 4,65
	PCS/BOX - 12
	M2/BOX - 4,17
	M2/PLT - 250,18
	BOX/PLT - 60





SPC



smartcore

Renovating any space is now really easy thanks to the outstanding properties of the **SPC - Stone Polymer Composite** - flooring which guarantees a **flawless overlay**.


It is the best choice for renovation projects.

FILM PROTETTIVO  
PROTECTIVE FILM

CARTA DECORATIVA  
DECOARTIVE LAYER

PANNELLO MINERALE  
IN SPC  
SPC MINERAL PANEL

MATERASSINO IXPE  
IXPE UNDERLAY

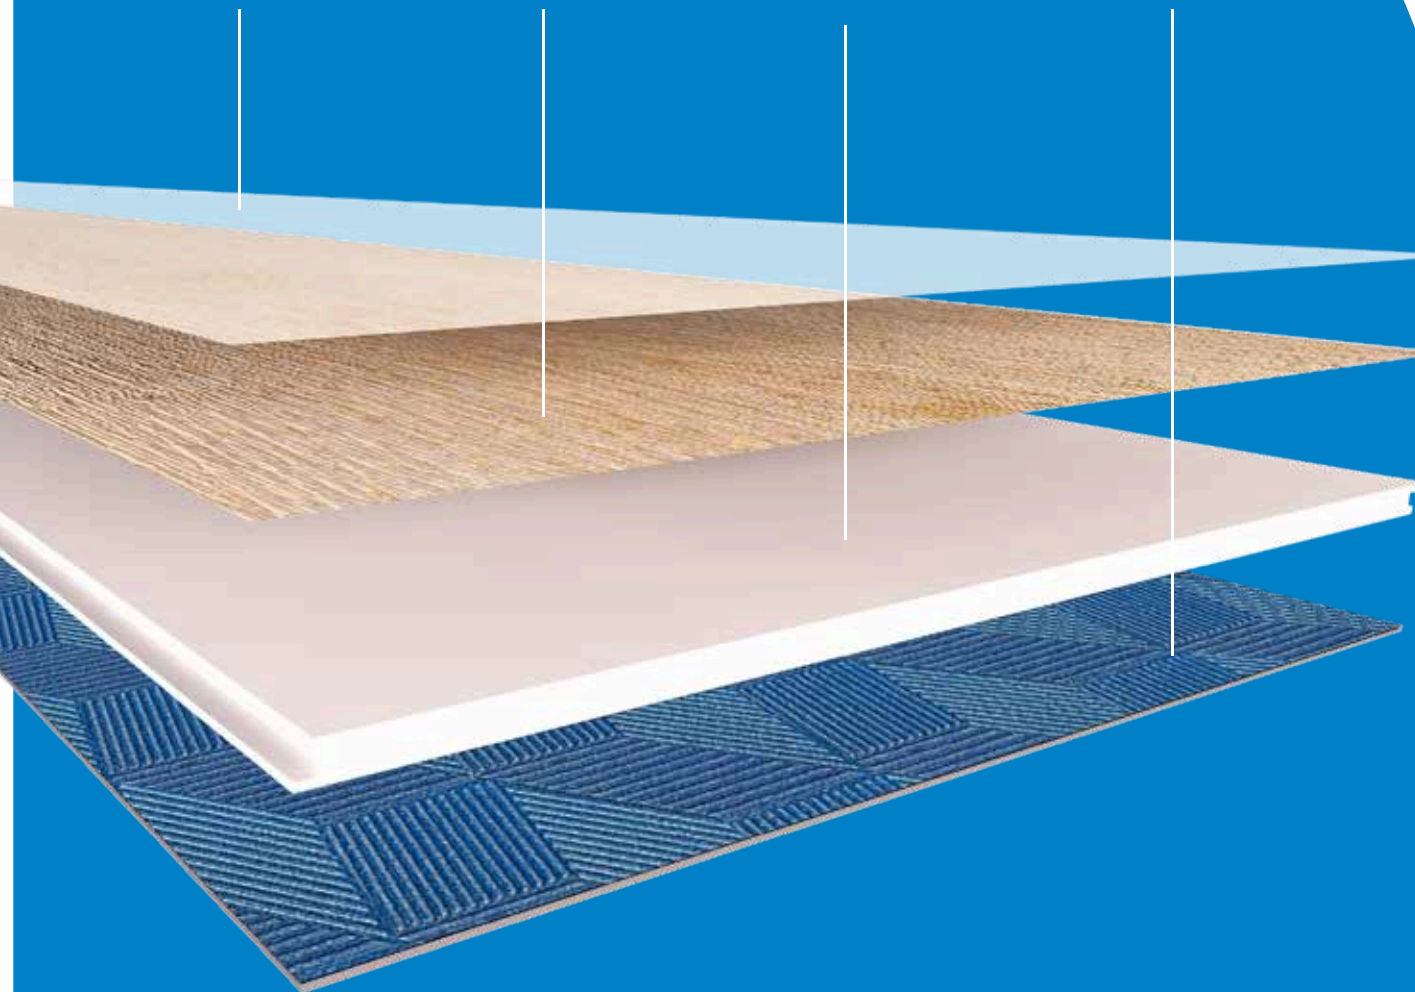

## STONE POLYMER COMPOSITE

SPC is a clever mix of *mineral powder* and polymer. These floors feature a structure that gives the boards surprising *rigidity*, allowing them to adapt perfectly to the flooring underneath.

*The SPC collection stands out for their remarkable practicality and low thickness, which means that, particularly for renovation work, they can be laid directly on top of the existing floor.*




SVR563

*You can install SPC directly on top of your existing floor - a practical and versatile option for adding a fresh, new look to your rooms.*



SVR404

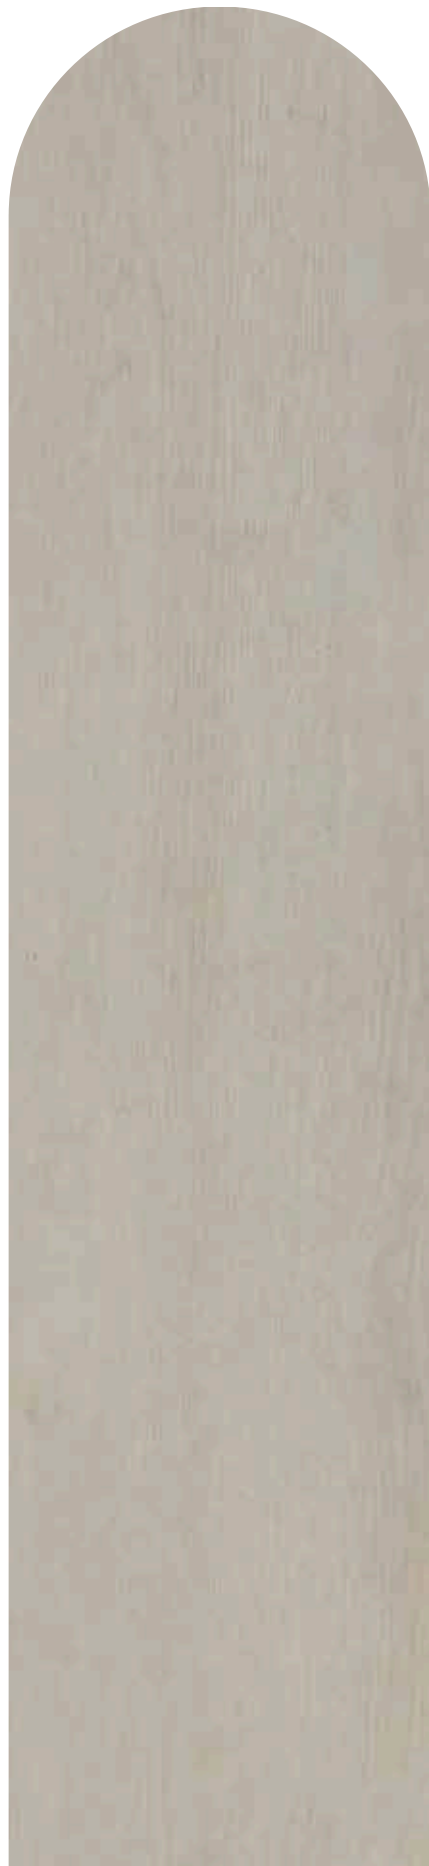

SVR410



SVR413



SVR422



SVR423



SVR424



# SVR4

SPC

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION




SVR410


SPESSORE <b>THICKNESS</b>	4 mm
RESISTENZA ALL'USURA <b>WEAR RESISTANCE</b>	Cl. 23 e 32
MATERASSINO <b>UNDERLAY</b>	Non incluso <b>Not included</b>
DIMENSIONI <b>DIMENSIONS</b>	4(0,4)x180x1220 mm
BISELLATURA <b>BEVEL</b>	Nano 4V
INCASTRO <b>INSTALLATION</b>	Unilin
RISCALDAMENTO A PAVIMENTO <b>INSTALLATION ON FLOOR HEATING</b>	Adatto <b>Suitable</b>

<b>IMBALLO PACKAGING</b>	KG/M2 - 10
	PCS/BOX - 12
	M2/BOX - 2,6352
	M2/PLT - 131,76
	BOX/PLT - 50

TIPO DI POSA-INCASTRO  
**INSTALLATION**

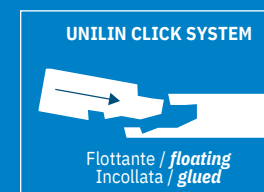

Accessori disponibili a pag. 86  
**Accessories available at page 86**

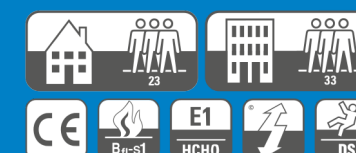



# SVR5 EVO

SPC



*A robust mineral-powder flooring, a stunning wood effect and a thickness of 5 mm, with integrated IXPE underlay. Available in a choice of nine beautiful colours and when fitted it gives the unique feel of natural wood.*

*For an even more realistic final result, we recommend alternating the boards during installation. A flooring that transforms every space into an experience.*



**BASSO SPESSORE**  
LOW THICKNESS



**POSA FLOTTANTE**  
FLOATING INSTALLATION



**STRUTTURA RIGIDA IN SPC**  
SPC RIGID STRUCTURE



**RESISTENTE ALL'USURA**  
WEAR RESISTANT



**FINITURA SUPER OPACA**  
ED EFFETTO REALISTICO  
SUPER MAT FINISH AND  
REALISTIC EFFECT



**ADATTO A RISCALDAMENTO**  
A PAVIMENTO  
SUITABLE FOR  
UNDERFLOOR HEATING



**MATERASSINO GIÀ**  
INCLUSO  
UNDERLAY INCLUDED




**CONFORTEVOLE AL CALPESTIO**  
COMFORTABLE TO WALK ON



**RESISTENTE ALL'ACQUA**  
WATER RESISTANT




SVR560

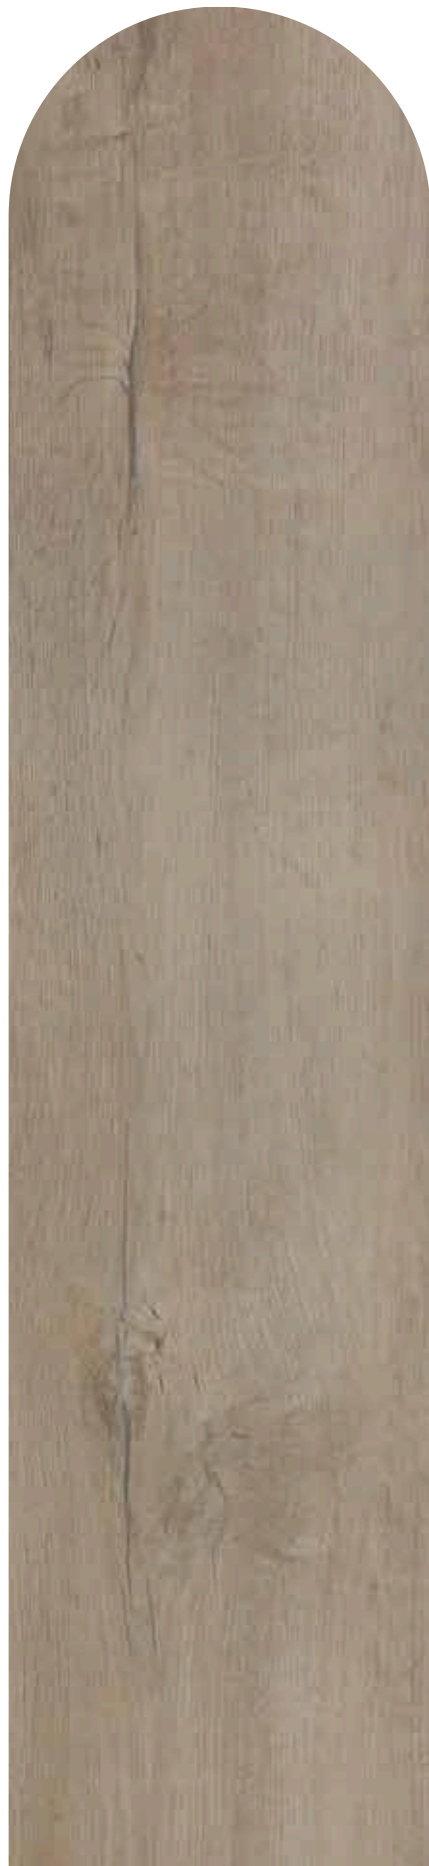


SVR561



SVR562

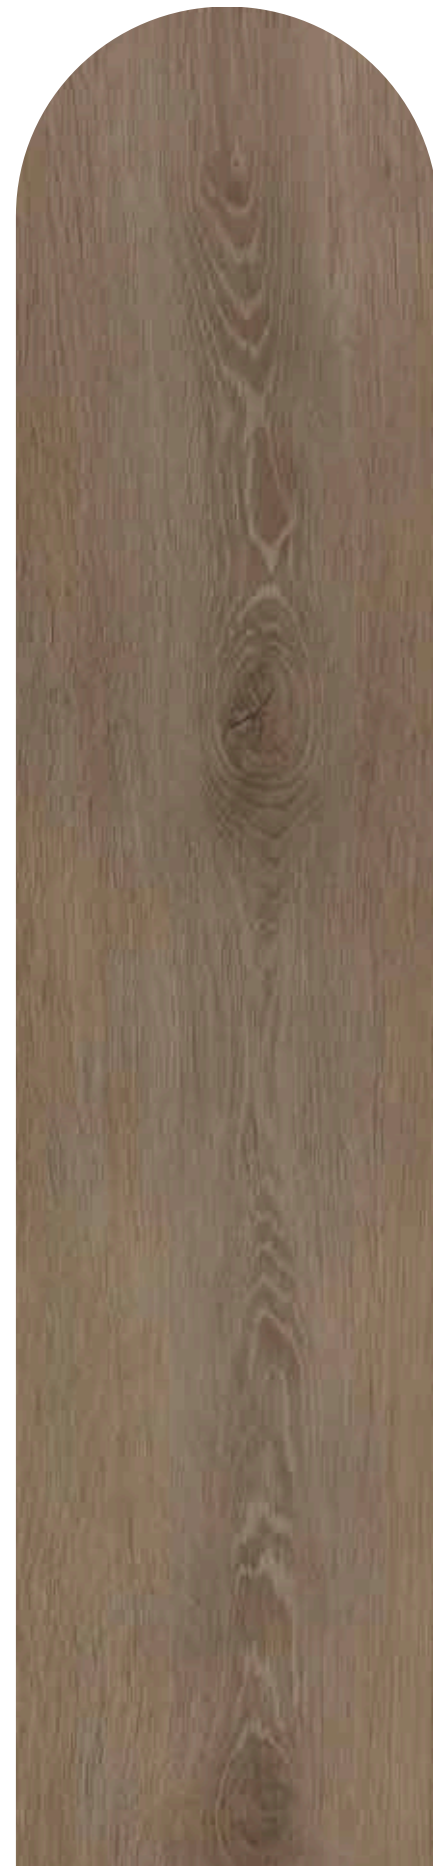


SVR563

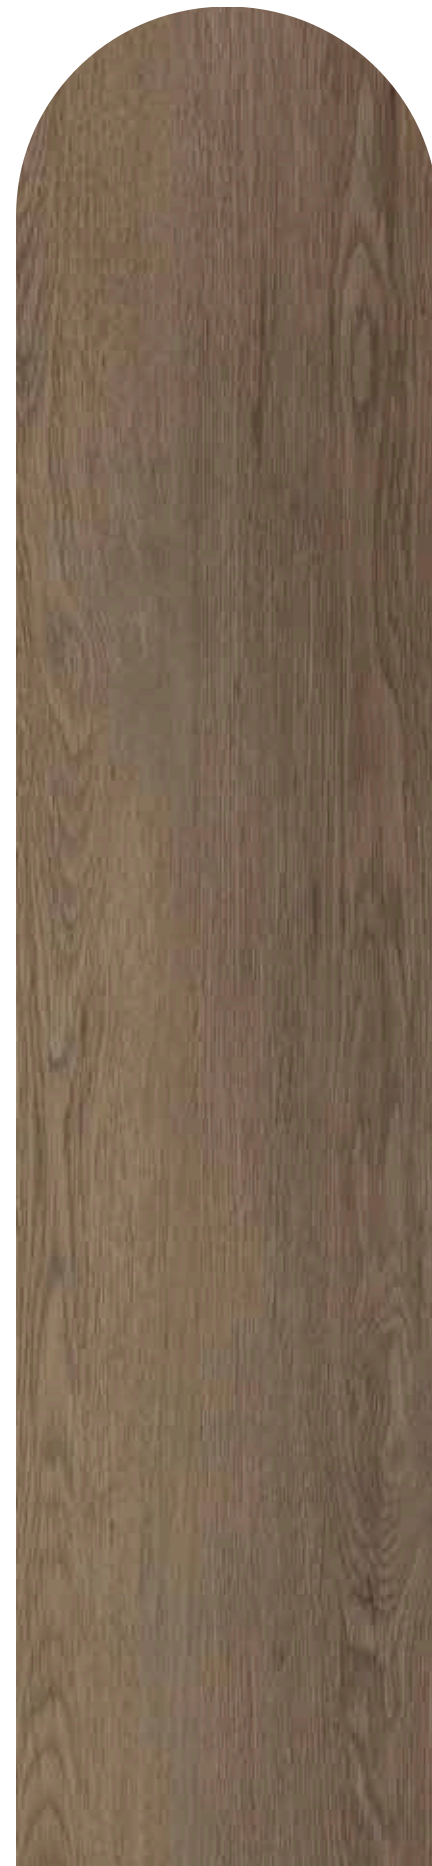

SVR564



SVR565

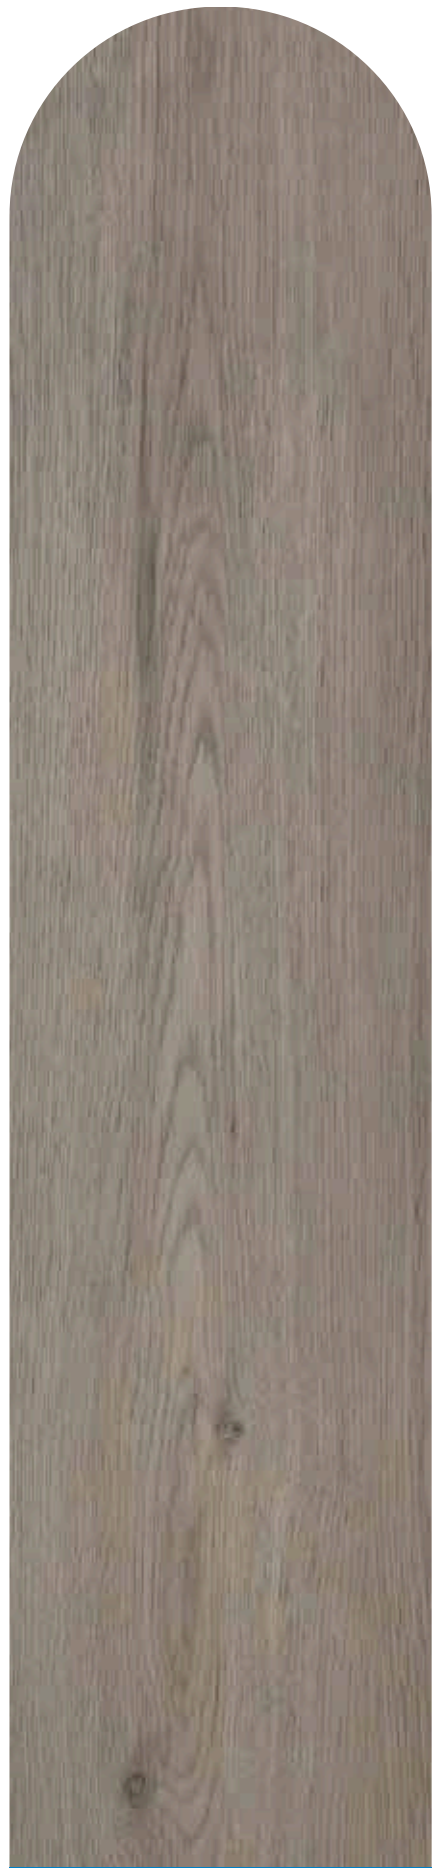

SVR566



SVR567



SVR568





# SVR5 EVO

## SPC

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION



<b>SPESSORE THICKNESS</b>	4+1 mm
<b>RESISTENZA ALL'USURA WEAR RESISTANCE</b>	Cl. 23 e 32
<b>DIMENSIONI DIMENSIONS</b>	4+1(0,4)x228x1524mm
<b>MATERASSINO UNDERLAY</b>	Incluso <i>Included</i>
<b>BISELLATURA BEVEL</b>	Nano 4V
<b>INCASTRO INSTALLATION</b>	Unilin
<b>RISCALDAMENTO A PAVIMENTO INSTALLATION ON FLOOR HEATING</b>	Adatto <i>Suitable</i>

**TIPO DI POSA-INCASTRO  
INSTALLATION**

**UNILIN CLICK SYSTEM**

Flottante/ *floating*  
Incollata, previa rimozione  
del materassino / *glued, after  
removal of the underlay*

Accessori disponibili a pag. 86  
*Accessories available at page 86*

<b>IMBALLO PACKAGING</b>	KG/M2 - 8,5 PCS/BOX - 7 M2/BOX - 2,4323 M2/PLT - 126,48 BOX/PLT - 52
------------------------------	--



# SVR6

SPC



**BASSO SPESSORE**  
LOW THICKNESS



**STRUTTURA RIGIDA IN SPC**  
SPC RIGID STRUCTURE



**FINITURA SUPER OPACA**  
ED EFFETTO REALISTICO  
SUPER MAT FINISH AND  
REALISTIC EFFECT



**MATERASSINO GIÀ**  
INCLUSO  
UNDERLAY INCLUDED



**RESISTENTE ALL'ACQUA**  
WATER RESISTANT



**POSA FLOTTANTE**  
FLOATING INSTALLATION



**RESISTENTE ALL'USURA**  
WEAR RESISTANT



**ADATTO A RISCALDAMENTO**  
A PAVIMENTO  
SUITABLE FOR  
UNDERFLOOR HEATING



**CONFORTEVOLE AL CALPESTIO**  
COMFORTABLE TO WALK ON



**ADATTO AD USO COMMERCIALE**  
SUITABLE FOR COMMERCIAL USE

*Mineral powder flooring, rigid, wood effect, 6 mm thick, brushed and embossed in-register and integrated IXPE underlay. A wonderfully beautiful wood effect floor, which recreates the grain and properties of the highest quality wood. For a more realistic final result, we recommend alternating the boards during installation.*



SVR641




SVR642



SVR643



SVR644

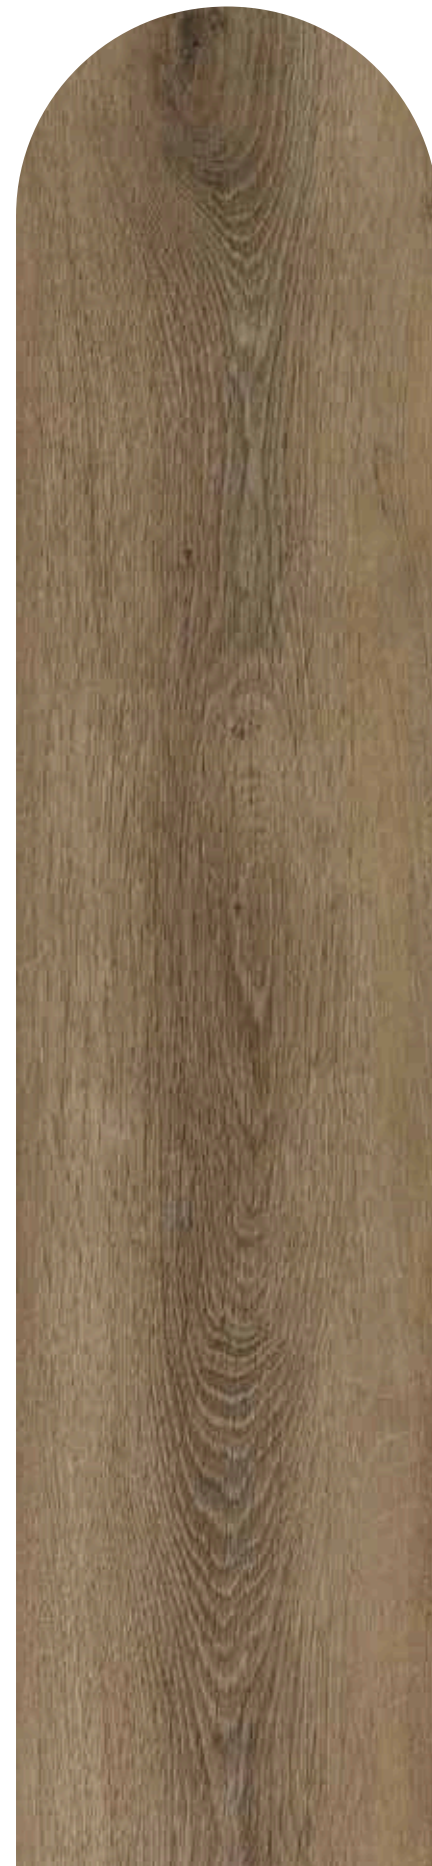


SVR645




SVR646




SVR647

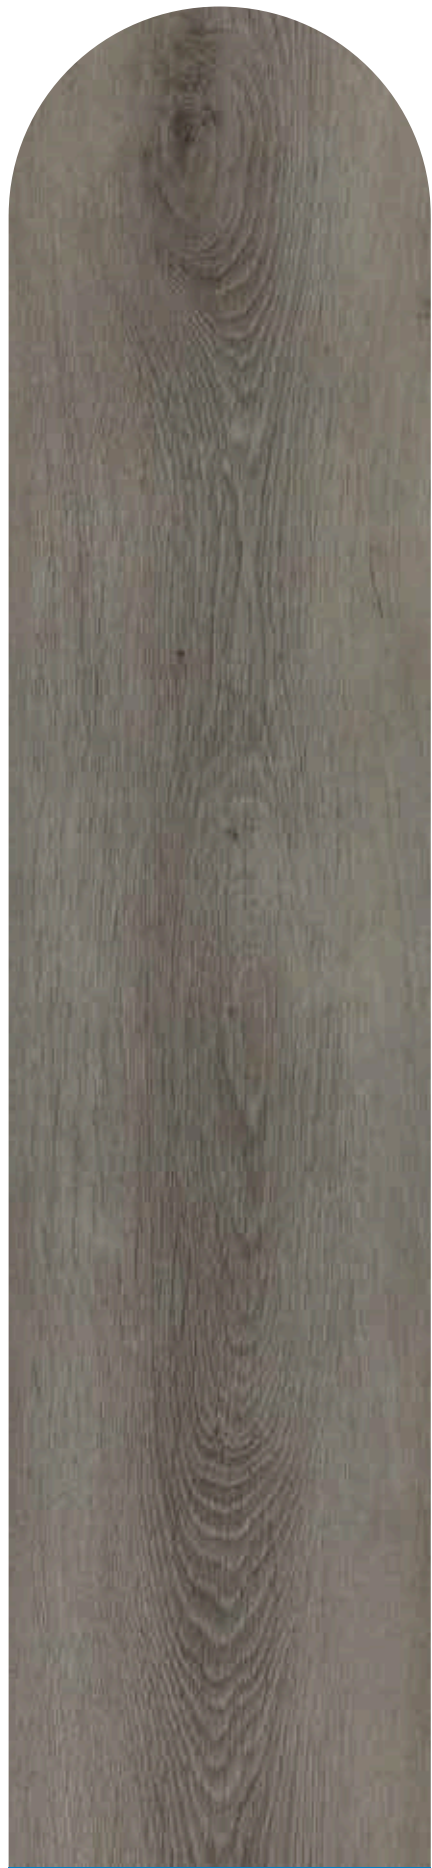

SVR648

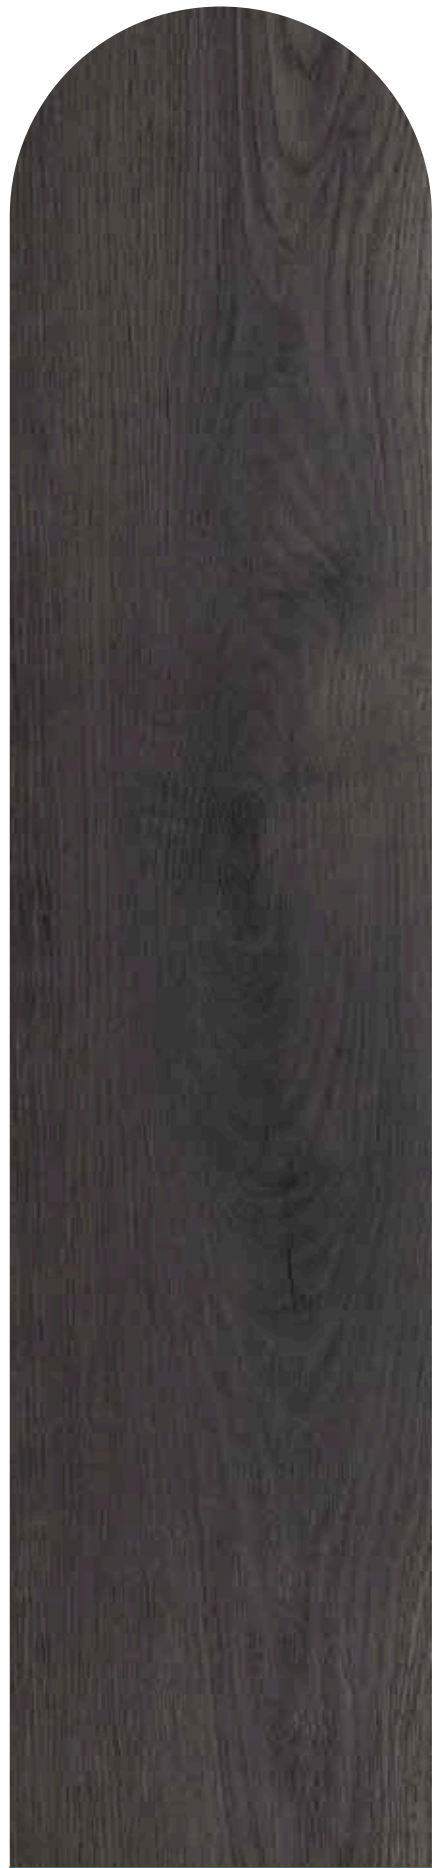

SVR649

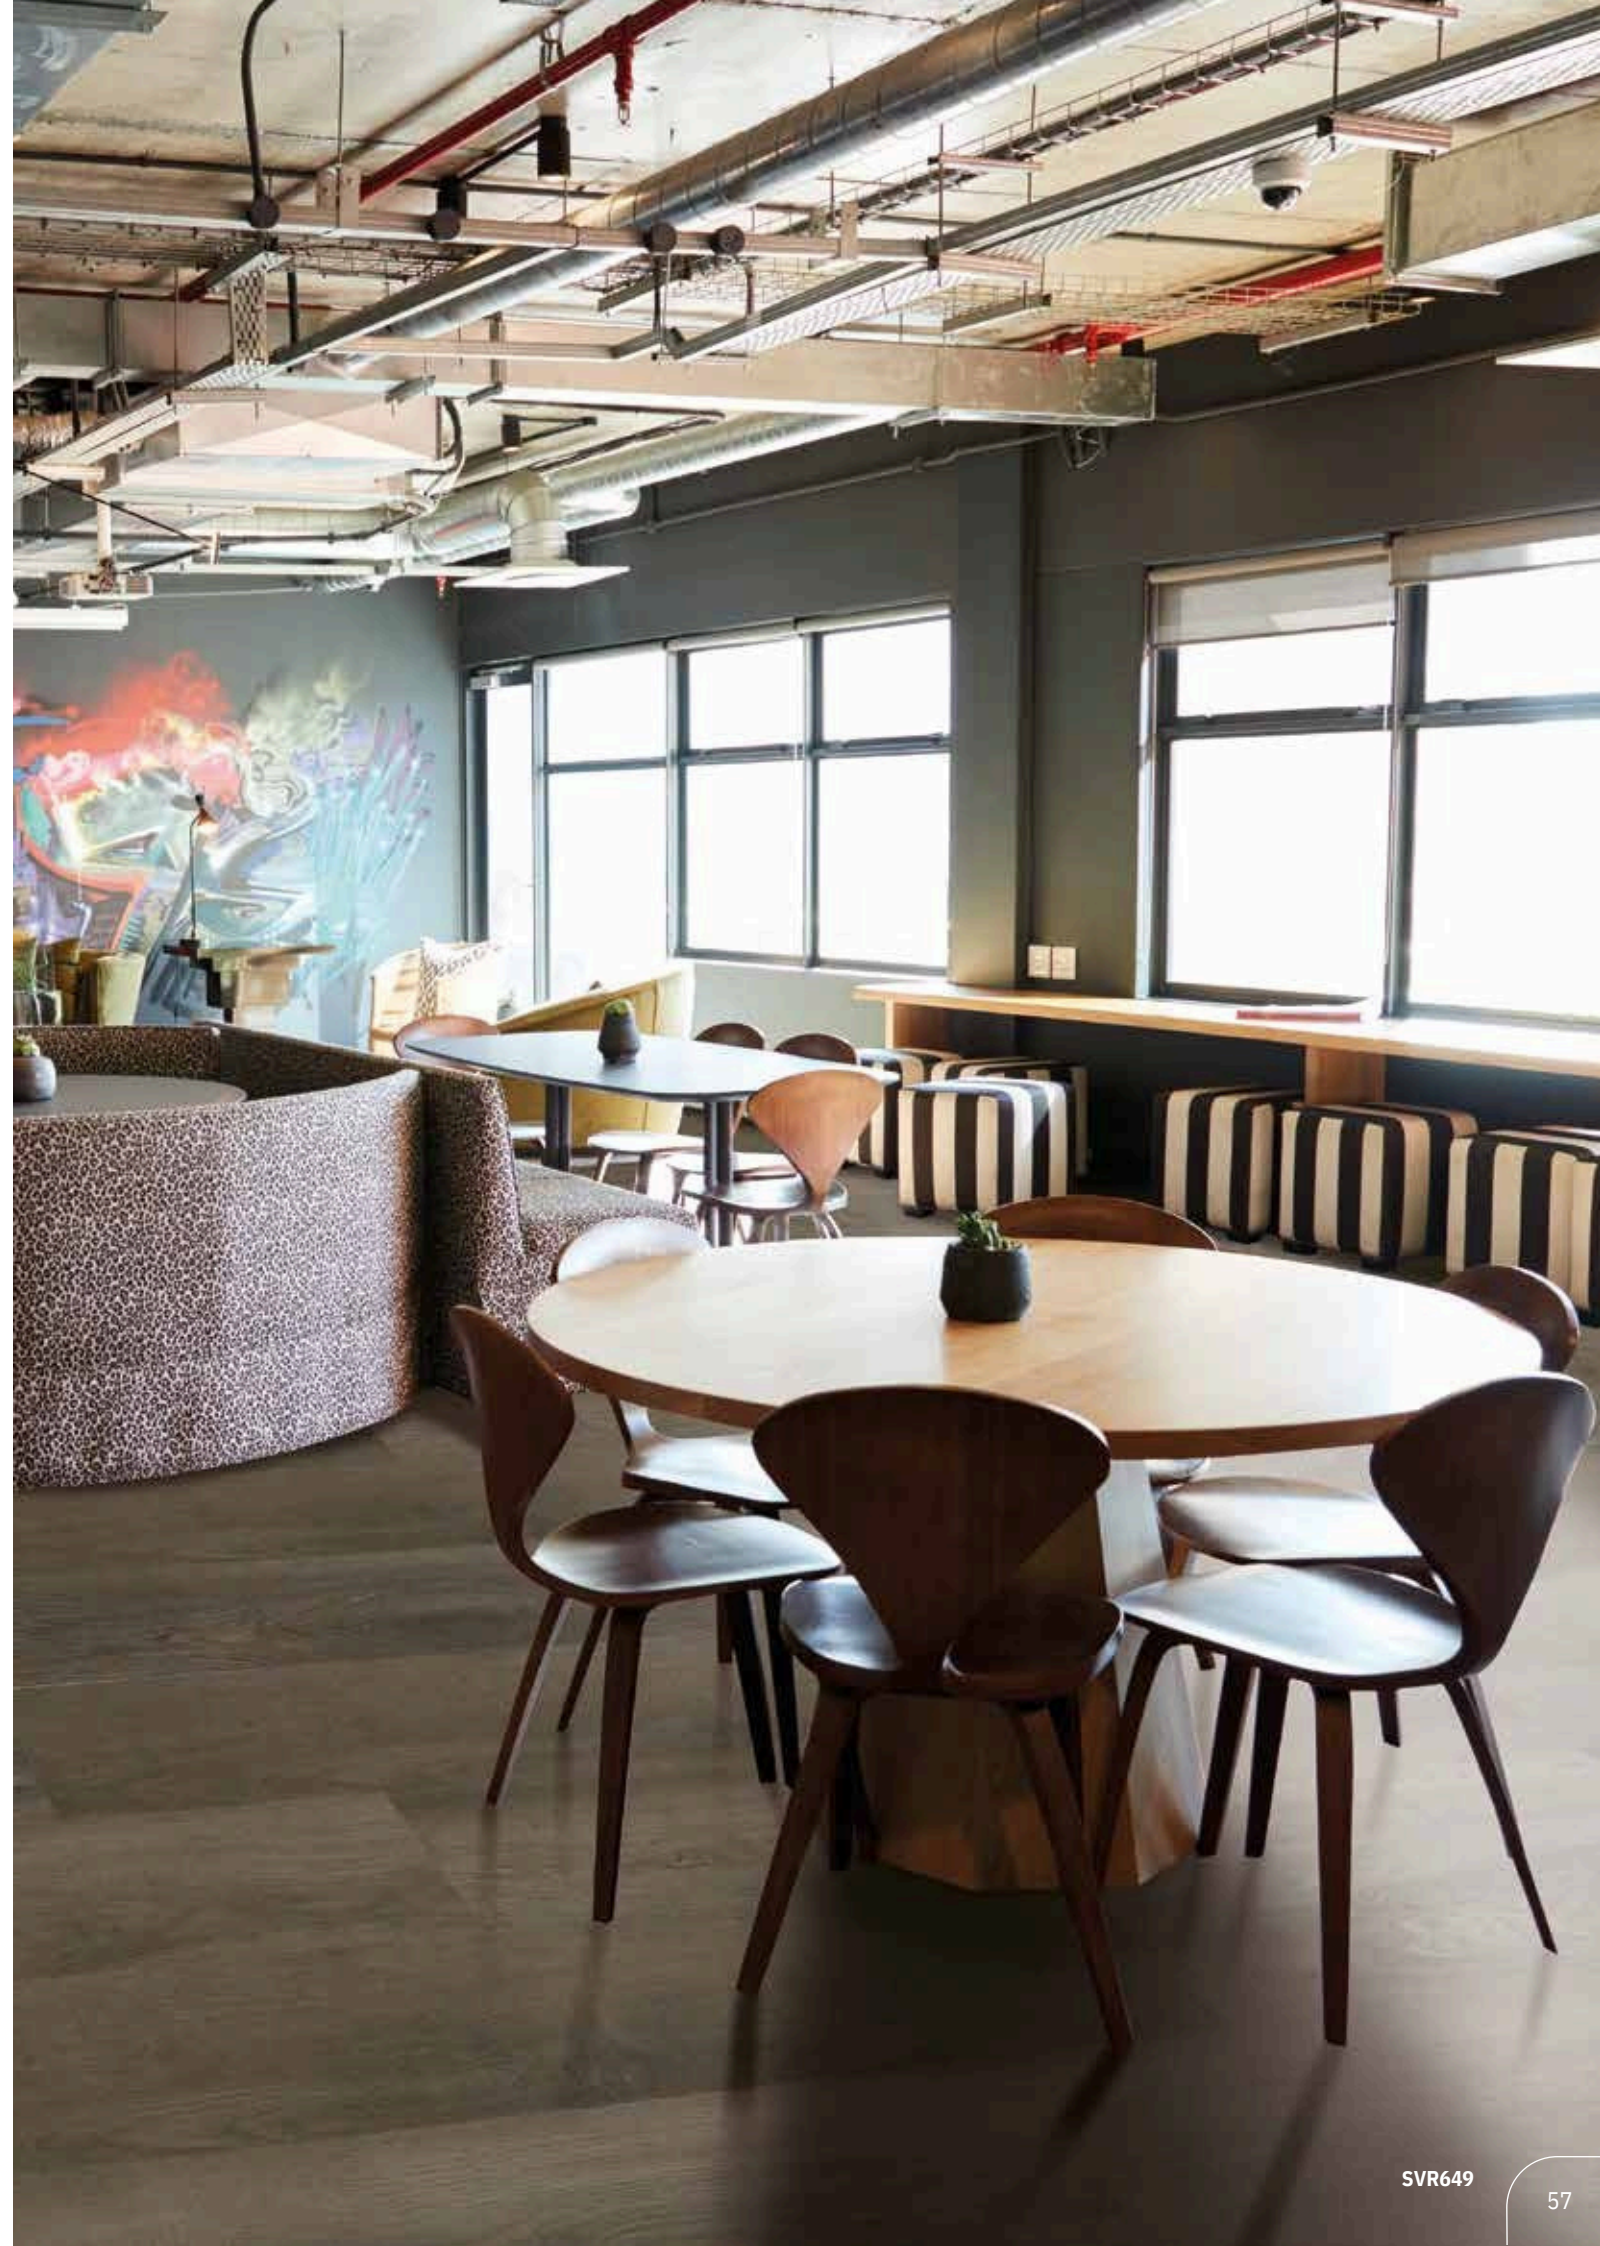



# SVR6

**SPC**

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION



SPESORE <b>THICKNESS</b>	5+1 mm
RESISTENZA ALL'USURA <b>WEAR RESISTANCE</b>	Cl. 23 e 33
DIMENSIONI <b>DIMENSIONS</b>	5+1(0,55)x228x1524 mm
MATERASSINO <b>UNDERLAY</b>	Incluso <b>Included</b>
BISELLATURA <b>BEVEL</b>	Nano 4V
INCASTRO <b>INSTALLATION</b>	Unilin
RISCALDAMENTO A PAVIMENTO <b>INSTALLATION ON FLOOR HEATING</b>	Adatto <b>Suitable</b>

TIPO DI POSA-INCASTRO  
**INSTALLATION**

**UNILIN CLICK SYSTEM**

Flottante/ *floating*  
Incollata, previa rimozione  
del materassino / *glued, after  
removal of the underlay*

Accessori disponibili a pag. 86  
**Accessories available at page 86**

<b>IMBALLO PACKAGING</b>	KG/M2 - 10
	PCS/BOX - 6
	M2/BOX - 2,085
	M2/PLT - 100,08
	BOX/PLT - 48





# SVR6 EVO

SPC



BASSO SPESSORE  
LOW THICKNESS



STRUTTURA RIGIDA IN SPC  
SPC RIGID STRUCTURE



FORMATO XL  
XL SIZE



FINITURA SUPER OPACA  
ED EFFETTO REALISTICO  
SUPER MAT FINISH AND  
REALISTIC EFFECT



POSA FLOTTANTE  
FLOATING INSTALLATION



RESISTENTE ALL'ACQUA  
WATER RESISTANT



MATERASSINO GIÀ  
INCLUSO  
UNDERLAY INCLUDED



RESISTENTE ALL'USURA  
WEAR RESISTANT



INCASTRO 5G CLICK  
INSTALLATION WITH 5G CLICK



ADATTO A RISCALDAMENTO  
A PAVIMENTO  
SUITABLE FOR  
UNDERFLOOR HEATING



ADATTO AD USO COMMERCIALE  
SUITABLE FOR COMMERCIAL USE

*Superb wood-effect XL boards, a stone powder composition, 6 mm thick with 5G click system, brushed and embossed in-register, integrated IXPE underlay.*


*This floor faithfully reproduces all of the grain and properties*

*of the most popular woods. For an even more realistic final result, we recommend alternating the boards during installation. Natural elegance in your home!*





SVR690

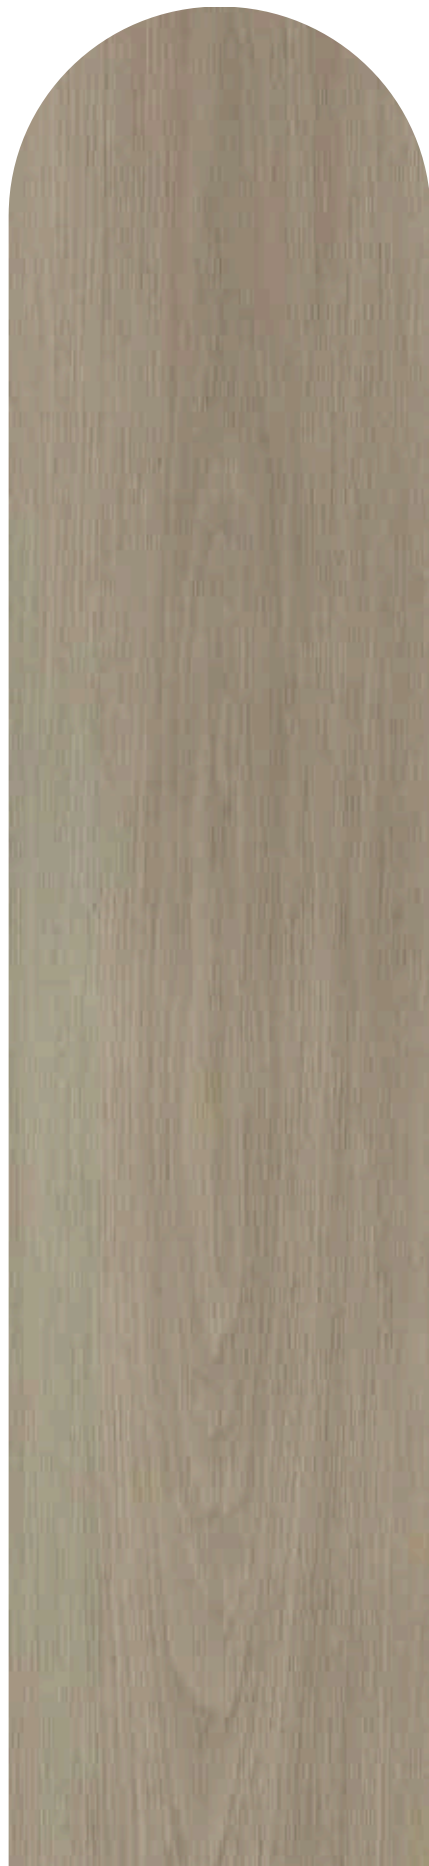


SVR691



SVR692



SVR693

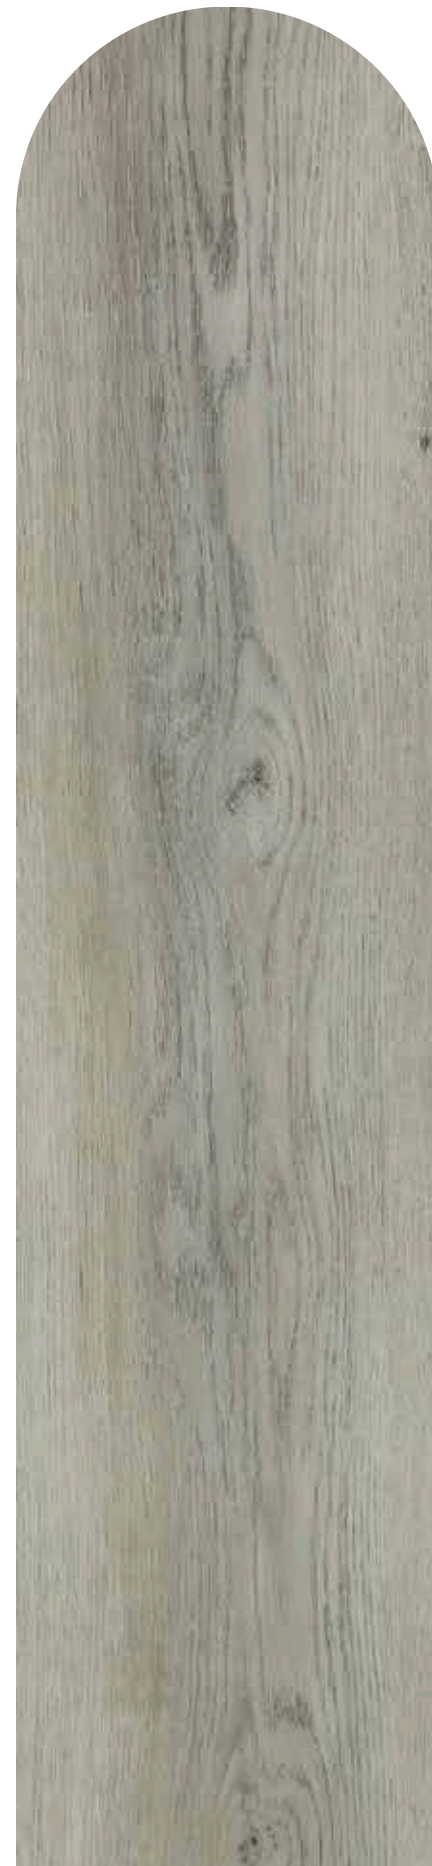

SVR694



SVR695



SVR696



SVR697



SVR698



SVR699





# SVR6 EVO

SPC

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION



SVR691

<b>SPESSORE THICKNESS</b>	5+1 mm
<b>RESISTENZA ALL'USURA WEAR RESISTANCE</b>	Cl. 23 e 33
<b>DIMENSIONI DIMENSIONS</b>	5+1(0,55)x228x1800mm
<b>MATERASSINO UNDERLAY</b>	Incluso <i>Included</i>
<b>BISELLATURA BEVEL</b>	Nano 4V
<b>INCASTRO INSTALLATION</b>	5G CLICK
<b>RISCALDAMENTO A PAVIMENTO INSTALLATION ON FLOOR HEATING</b>	Adatto <i>Suitable</i>

<b>IMBALLO PACKAGING</b>	KG/M2 - 10 PCS/BOX - 5 M2/BOX - 2,052 M2/PLT - 90,288/114,91 BOX/PLT - 44 / 56
------------------------------	--

TIPO DI POSA-INCASTRO  
INSTALLATION

**5G CLICK**

Flottante/ *floating*  
Incollata, previa rimozione  
del materassino / *glued, after*  
*removal of the underlay*



Accessori disponibili a pag. 86  
*Accessories available at page 86*



# SVR7 MINI

SPC



BASSO SPESSORE  
LOW THICKNESS



STRUTTURA RIGIDA IN SPC  
SPC RIGID STRUCTURE



MATERASSINO GIÀ  
INCLUSO  
UNDERLAY INCLUDED



RESISTENTE ALL'USURA  
WEAR RESISTANT



FINITURA SUPER OPACA  
ED EFFETTO REALISTICO  
SUPER MAT FINISH AND  
REALISTIC EFFECT



EFFETTO CEMENTO  
CONCRETE EFFECT



ADATTO AD USO  
COMMERCIALE  
SUITABLE FOR  
COMMERCIAL USE



POSA FLOTTANTE  
FLOATING INSTALLATION



ADATTO A RISCALDAMENTO A  
PAVIMENTO  
SUITABLE FOR UNDERFLOOR HEATING



RESISTENTE ALL'ACQUA  
WATER RESISTANT



**5G** INCASTRO 5G CLICK  
INSTALLATION WITH 5G CLICK

*Flooring with a mineral structure that gives a striking concrete effect; 7 mm thick and integrated IXPE underlay.*

*Available in 3 shades of grey, the concrete effect fits in perfectly with modern homes or commercial settings. We recommend offset installation on a flat base to maximise the appearance and durability of the flooring. A contemporary touch that suits any style!*






SVR785



SVR786



SVR787

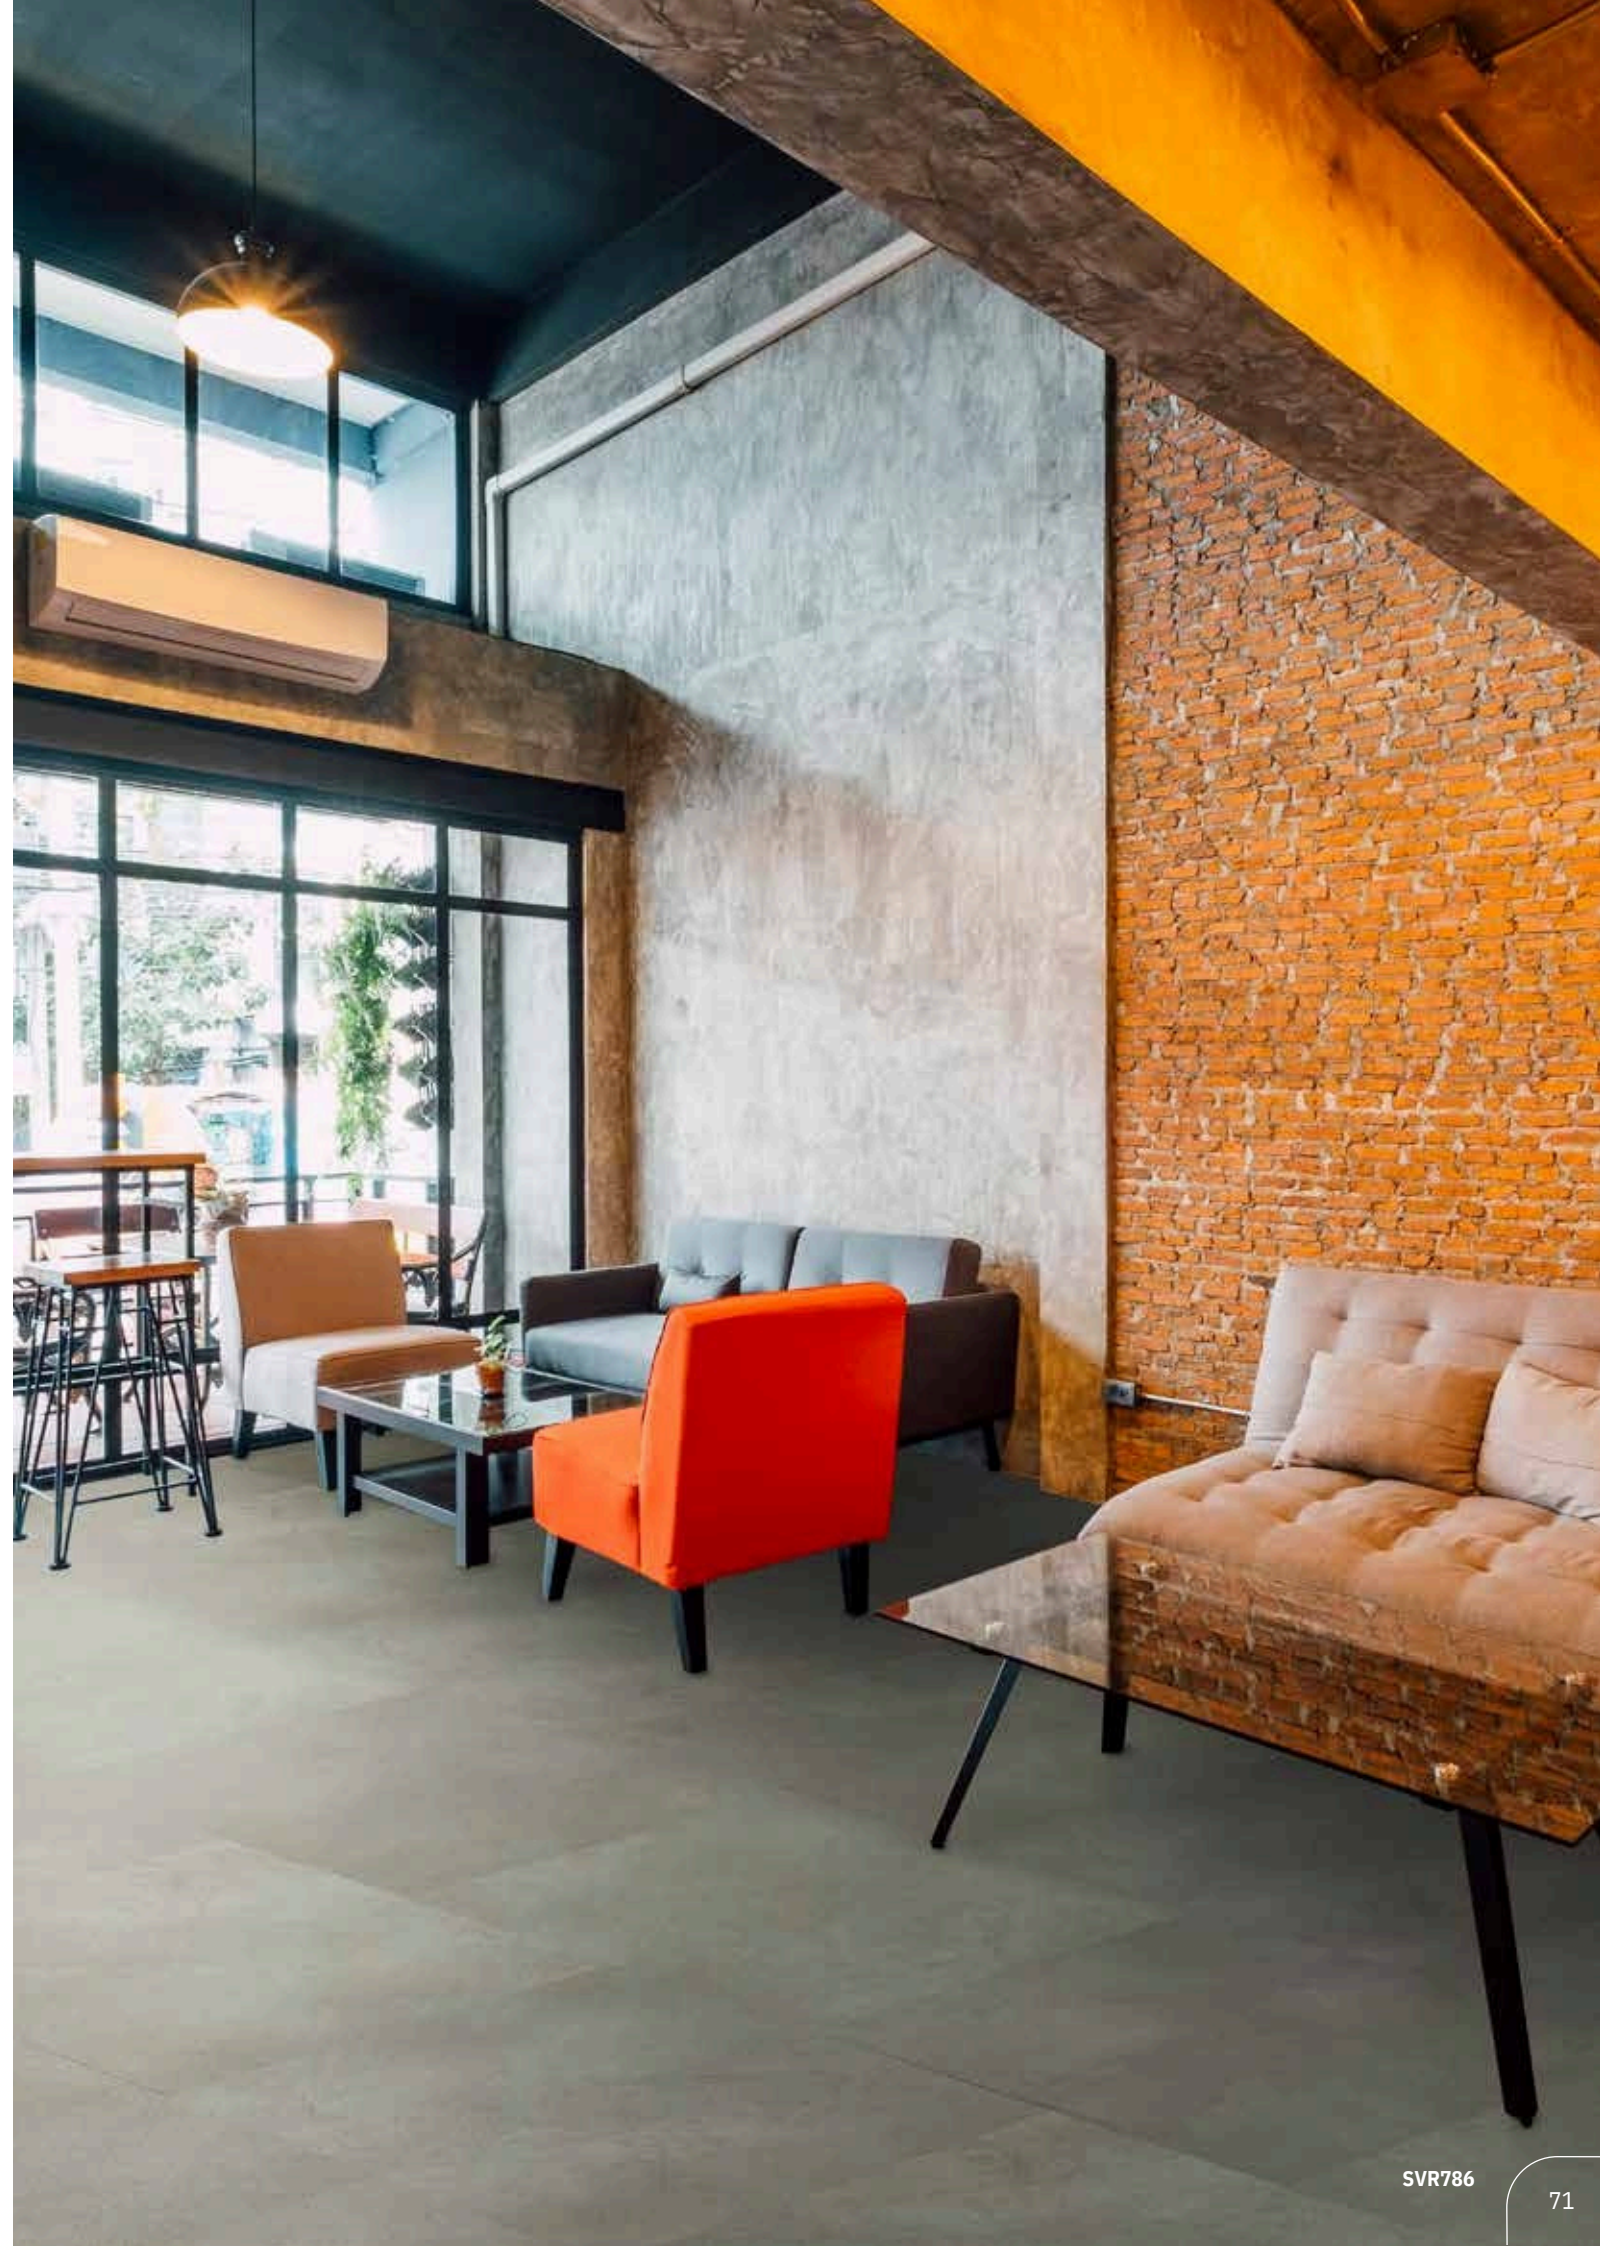



# SVR7 MINI

SPC

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION




SVR785

SPESSORE <i>THICKNESS</i>	5,5 + 1,5 mm
RESISTENZA ALL'USURA <i>WEAR RESISTANCE</i>	Cl. 23 e 33
DIMENSIONI <i>DIMENSIONS</i>	5,5+1,5(0,55)x300x600mm
MATERASSINO <i>UNDERLAY</i>	Incluso <i>Included</i>
BISELLATURA <i>BEVEL</i>	Nano 4V
INCASTRO <i>INSTALLATION</i>	5G CLICK
RISCALDAMENTO A PAVIMENTO <i>INSTALLATION ON FLOOR HEATING</i>	Adatto <i>Suitable</i>

IMBALLO <i>PACKAGING</i>	KG/M2 - 11 PCS/BOX - 6 M2/BOX - 1,08 M2/PLT - 64,8 BOX/PLT - 60
-----------------------------	---

TIPO DI POSA-INCASTRO  
*INSTALLATION*

**5G CLICK**



Flottante/ *floating*  
Incollata, previa rimozione  
del materassino / *glued, after  
removal of the underlay*



Accessori disponibili a pag. 86  
*Accessories available at page 86*



# SV8

Long and stylish 1800 mm boards, XL format with a thickness of 8 mm. SV8 gives a completely new and different look in any setting. Integrated IXPE underlay. Versatile enough to please all tastes, it is the answer you have been looking for.

EPC



PANNELLO FLESSIBILE  
IN EPC  
EPC FLEXIBLE PANEL



MATERASSINO GIÀ  
INCLUSO  
UNDERLAY INCLUDED



ALTA RESISTENZA ALL'USURA  
HIGH WEAR RESISTANCE



CONFORTEVOLE AL CALPESTIO  
COMFORTABLE TO WALK ON



RESISTENTE ALL'ACQUA  
WATER RESISTANT



FORMATO XL  
XL SIZE



PERFORMANCE  
ACUSTICHE ECCELLENTI  
HIGH ACOUSTIC  
PERFORMANCES




ADATTO A RISCALDAMENTO  
A PAVIMENTO  
SUITABLE FOR  
UNDERFLOOR HEATING



POSA FLOTTANTE  
FLOATING INSTALLATION



INCASTRO 5G CLICK  
INSTALLATION WITH 5G CLICK

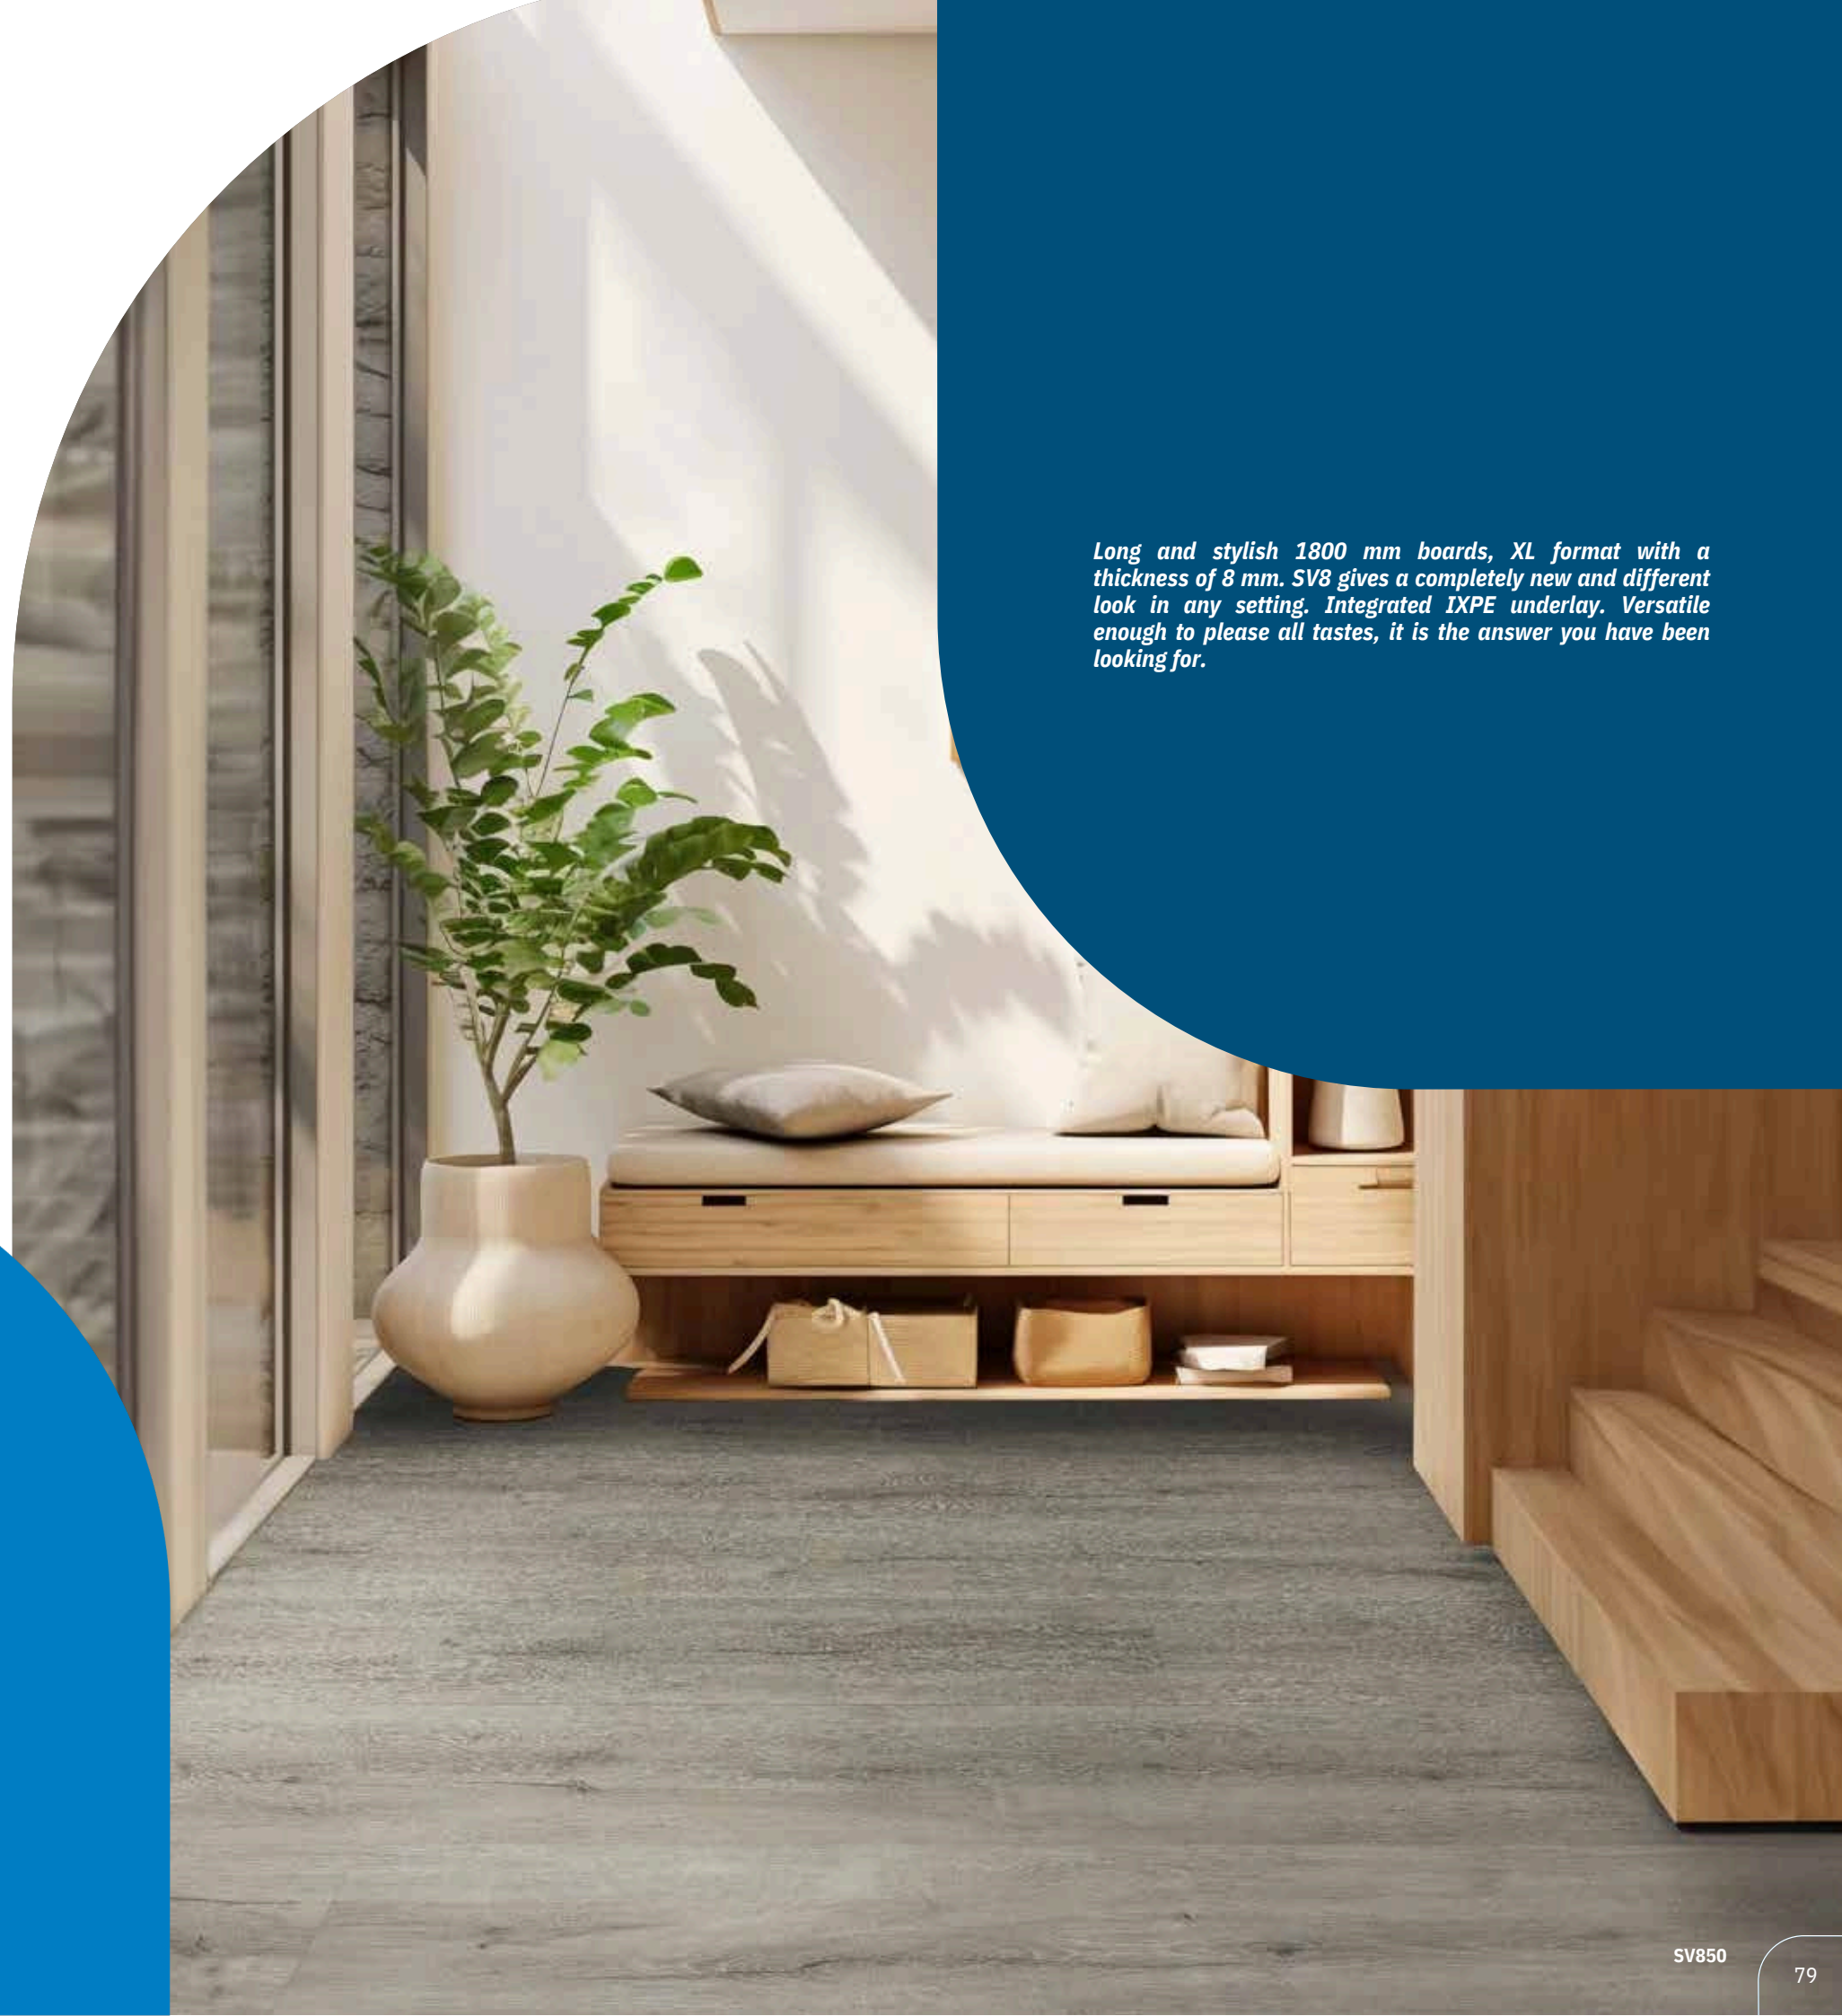







SV850



SV851

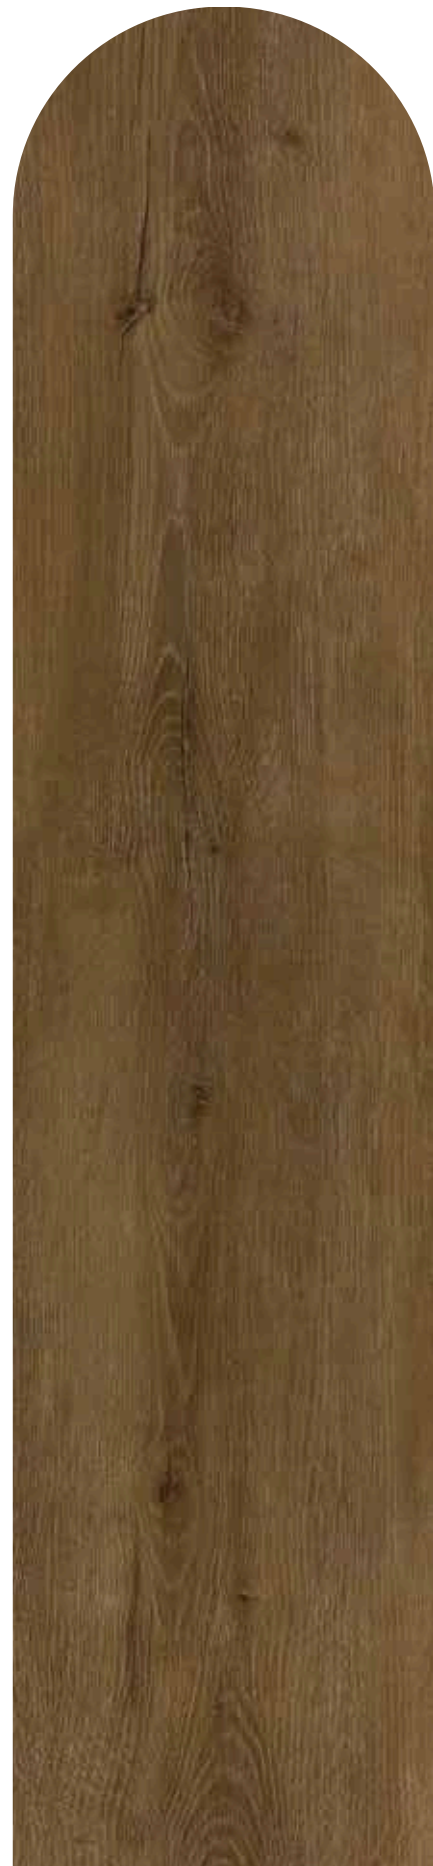

SV852

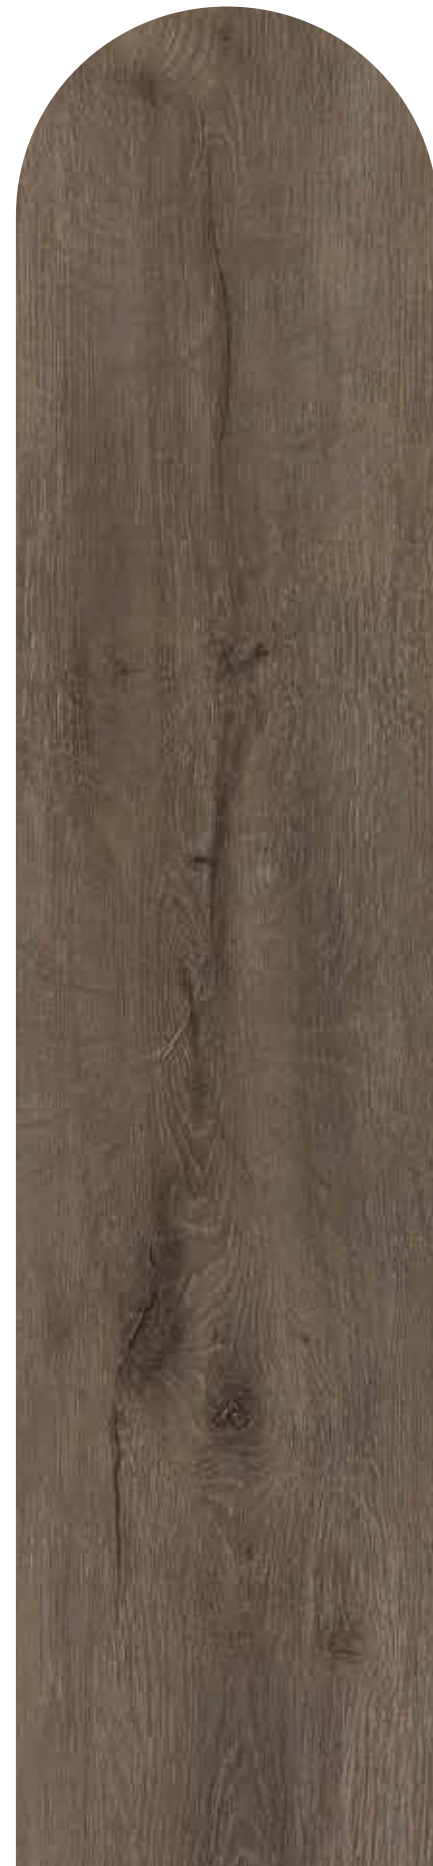

SV853




SV854N



SV855



SV856

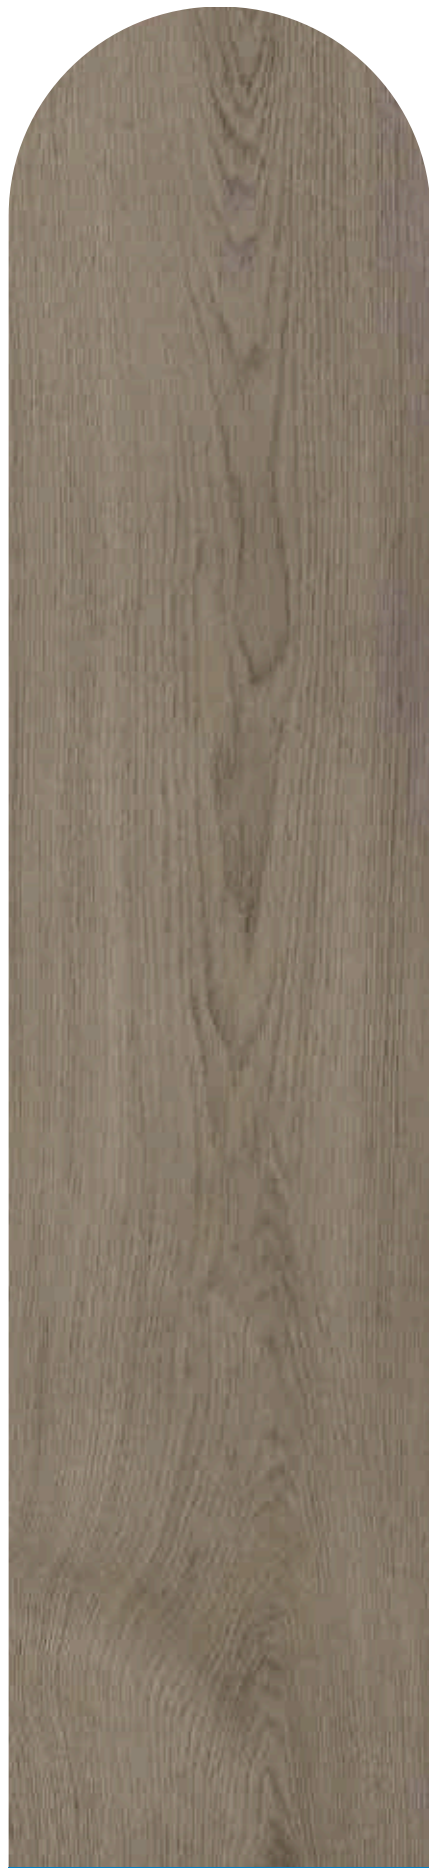

SV857



SV858



SV859





# SV8

**EPC**

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION



<b>SPESSORE THICKNESS</b>	7 + 1 mm
<b>RESISTENZA ALL'USURA WEAR RESISTANCE</b>	Cl. 23 e 34
<b>DIMENSIONI DIMENSIONS</b>	7+1(0,7)x228x1800mm
<b>MATERASSINO UNDERLAY</b>	Incluso <i>Included</i>
<b>BISELLATURA BEVEL</b>	Nano 4V
<b>INCASTRO INSTALLATION</b>	5G CLICK
<b>RISCALDAMENTO A PAVIMENTO INSTALLATION ON FLOOR HEATING</b>	Adatto <i>Suitable</i>
<b>IMBALLO PACKAGING</b>	KG/M2 - 8,9 PCS/BOX - 5 M2/BOX - 2,052 M2/PLT - 106,70 BOX/PLT - 52

TIPO DI POSA-INCASTRO  
**INSTALLATION**

**5G CLICK**

Flottante/ *floating*  
Incollata, previa rimozione  
del materassino / *glued, after*  
*removal of the underlay*



Accessori disponibili a pag. 86  
*Accessories available at page 86*





*SmartWood is here and making headlines! We are literally revolutionising the world of SPC flooring.*

*With all the essential characteristics of a technical floor, this product stands out*

*because of the added layer of pure wood on the surface. This unique feature gives the floor an unparalleled quality and beauty, bringing out the refined essence of this material.*

*Once laid, it gives the effect of a real solid wood parquet. Nature meets innovation to produce a flooring with unrivalled appeal!*



MARA - SW707

## REAL WOOD

A *real wood surface layer* that transforms the flooring, marrying beauty and comfort. The properties of a technical flooring that provide the harmony of design, eye-catching appearance and levels of comfort that you have always wanted. The beauty of walking on real wood.

## UNDERFLOOR HEATING

Thanks to its *robust mineral powder core*, SmartWood is popular for its beautiful appearance and thermal comfort, providing an even temperature. It is also ideal for underfloor heating. Bring warmth and beauty to every step.






RITA - SW705

## WEAR-RESISTANT

*SmartWood floorings are designed to resist wear and tear and maximise durability wherever they are used. The ultra-resistant coating makes them even stronger and perfect for commercial environments.*

## IMPACT-RESISTANT

The *high resistance to the impact* makes the SmartWood floors sturdy in case of blows, falls of objects and accidents. The natural beauty of wood with the hardness of the SPC, an impeccable mix of elegance and resistance.

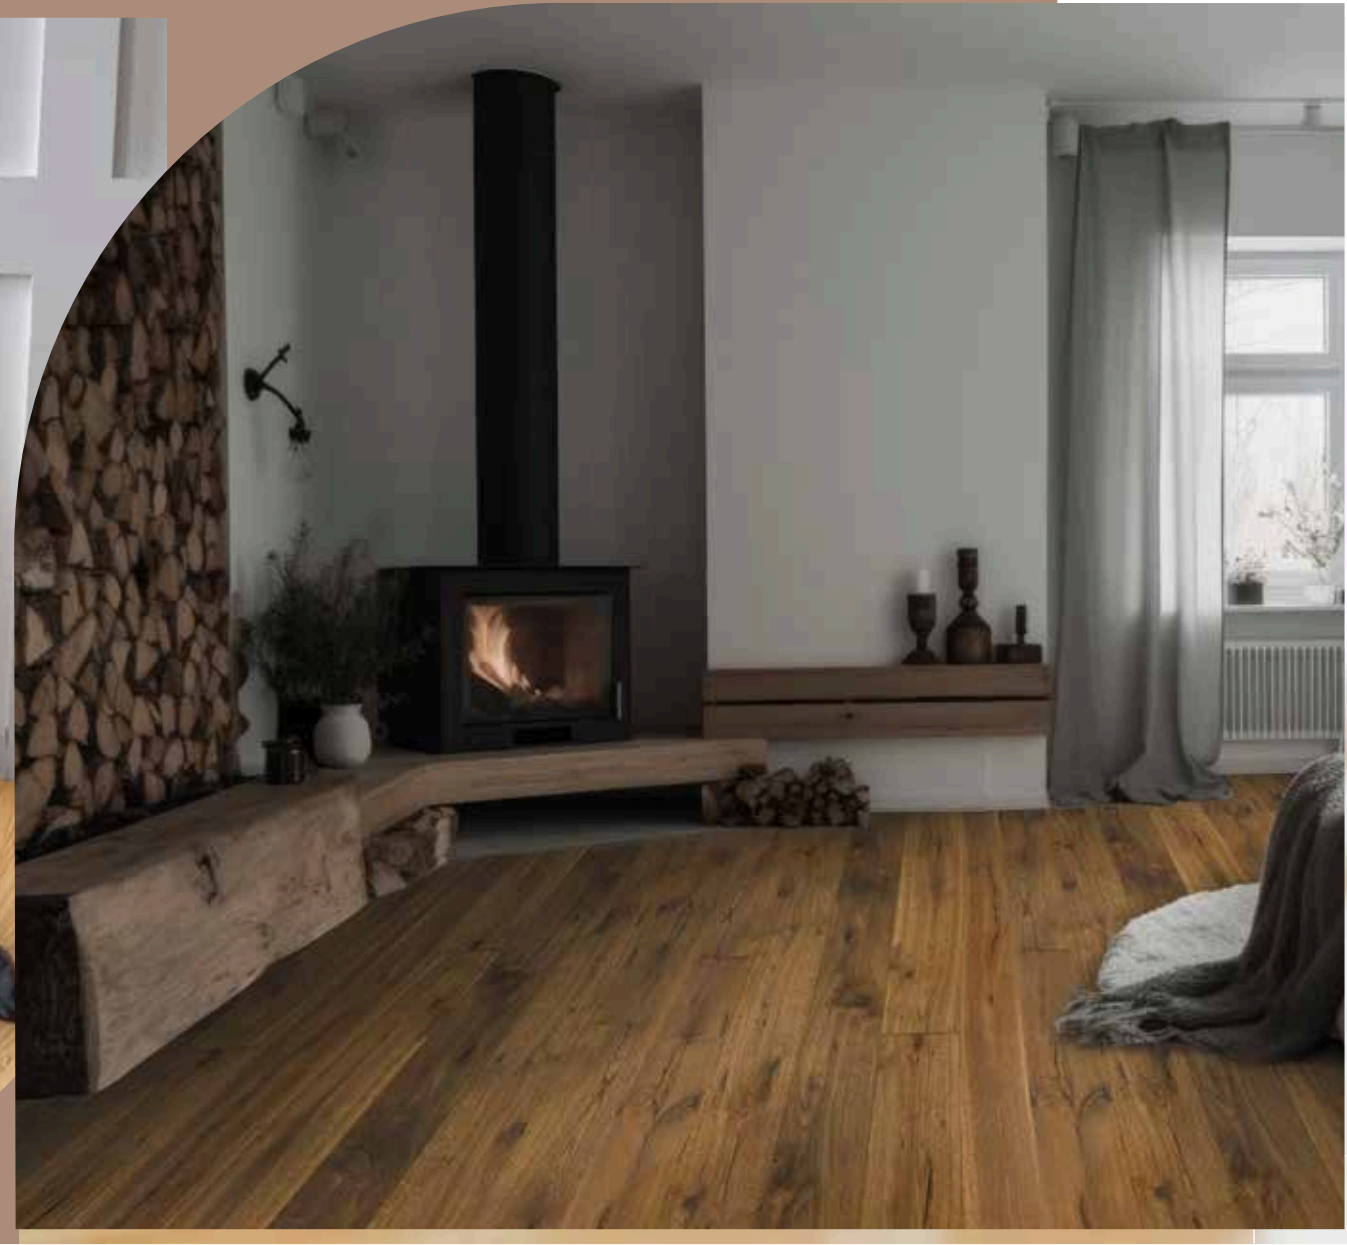



CLOE - SW701

## STABILITY

*The SPC panel provides incredible stability for the flooring, even in settings where there may be moisture. Thanks to this important feature, the floor is less affected by seasonal variations in humidity or water spills.*

## ULTRA-RESISTANT COATING


*The super-durable coating makes this floor truly flawless! Even in commercial environments, such as clothing shops and luxury hotels, it retains its robustness without sacrificing style and class.*



NORA - SW702



**smartwood**

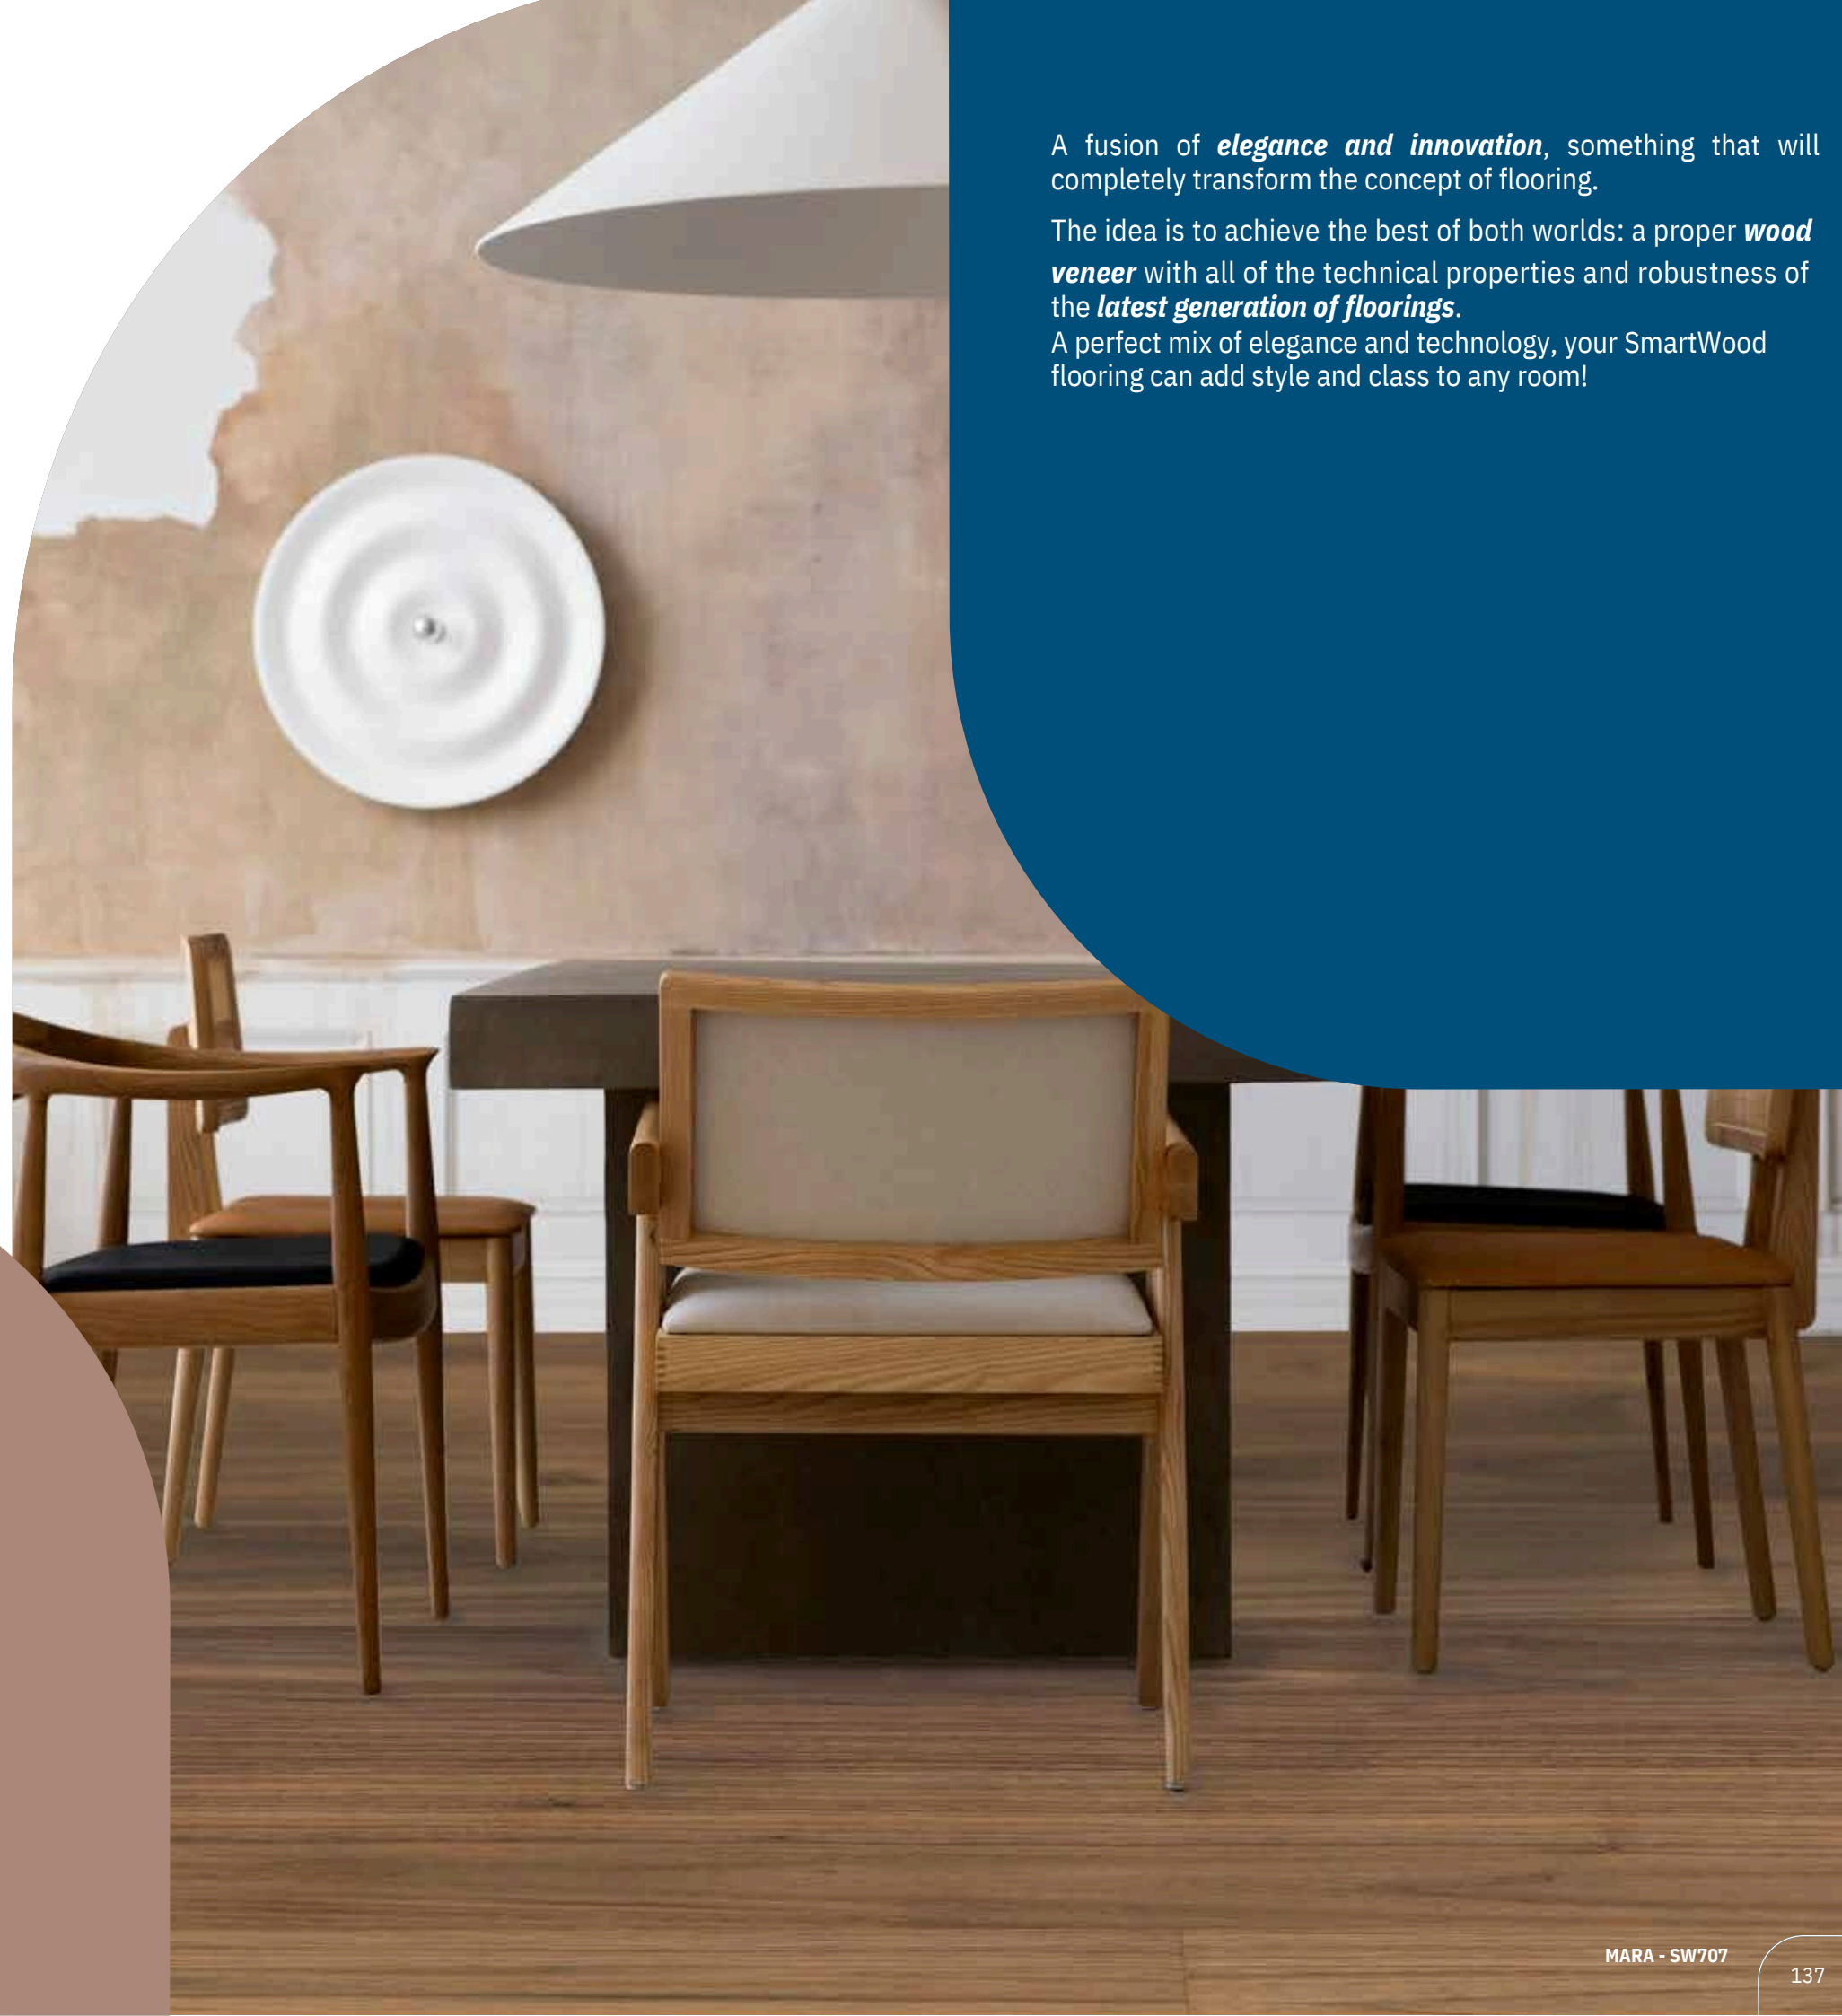

A fusion of **elegance and innovation**, something that will completely transform the concept of flooring.

The idea is to achieve the best of both worlds: a proper **wood veneer** with all of the technical properties and robustness of the **latest generation of floorings**.

A perfect mix of elegance and technology, your SmartWood flooring can add style and class to any room!



STRATO NOBILE IN VERO LEGNO  
REAL WOOD TOP LAYER



BASSO SPESSORE  
LOW THICKNESS



CALORE E BELLEZZA DEL LEGNO CON PRESTAZIONI DEL SPC  
THE WARMTH AND THE BEAUTY OF REAL WOOD WITH THE PERFORMANCES OF SPC



IDONEO AD AMBIENTI UMIDI  
SUITABLE FOR HUMID ENVIRONMENTS



CLASSE DI RESISTENZA AL FUOCO CFL-S1  
CFL-S1 FIRE RESISTANCE CLASS



MATERASSINO IN SUGHERO  
CORK UNDERLAY



VERNICE ULTRARESISTENTE  
HIGH RESISTANCE COATING



SOTTOFONDO ACUSTICO  
ACUSTIC UNDER LAYER



PANNELLO MINERALE IN SPC  
SPC MINERAL PANEL



ADATTO A RISCALDAMENTO A PAVIMENTO  
SUITABLE FOR UNDERFLOOR HEATING



INCASTRO 5G CLICK  
INSTALLATION WITH 5G CLICK







CLOE - SW701



NORA - SW702

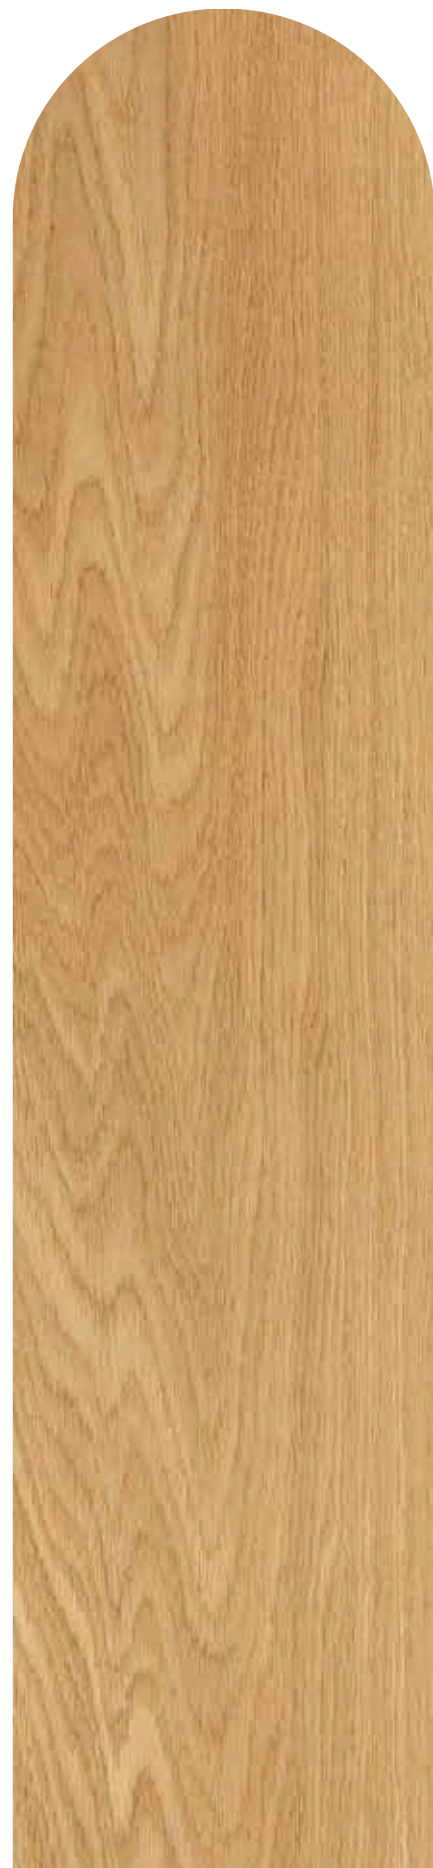

VERA - SW703

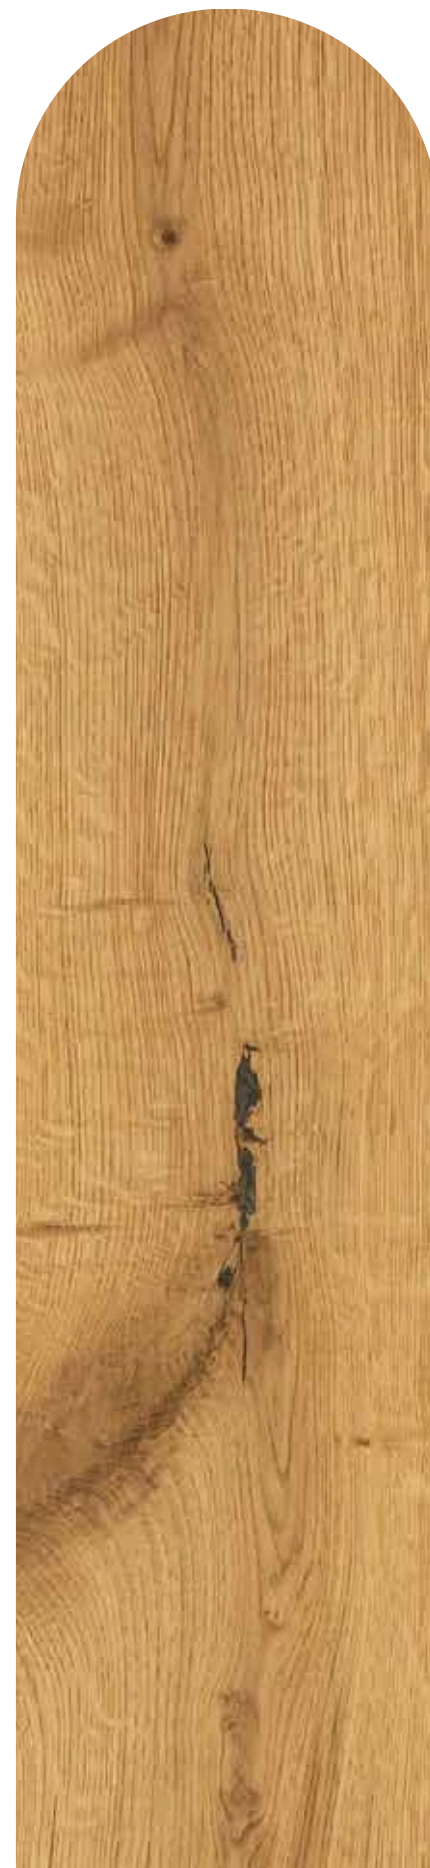

IRIS - SW704



RITA - SW705




INES - SW706



MARA - SW707



IRIS - SW704

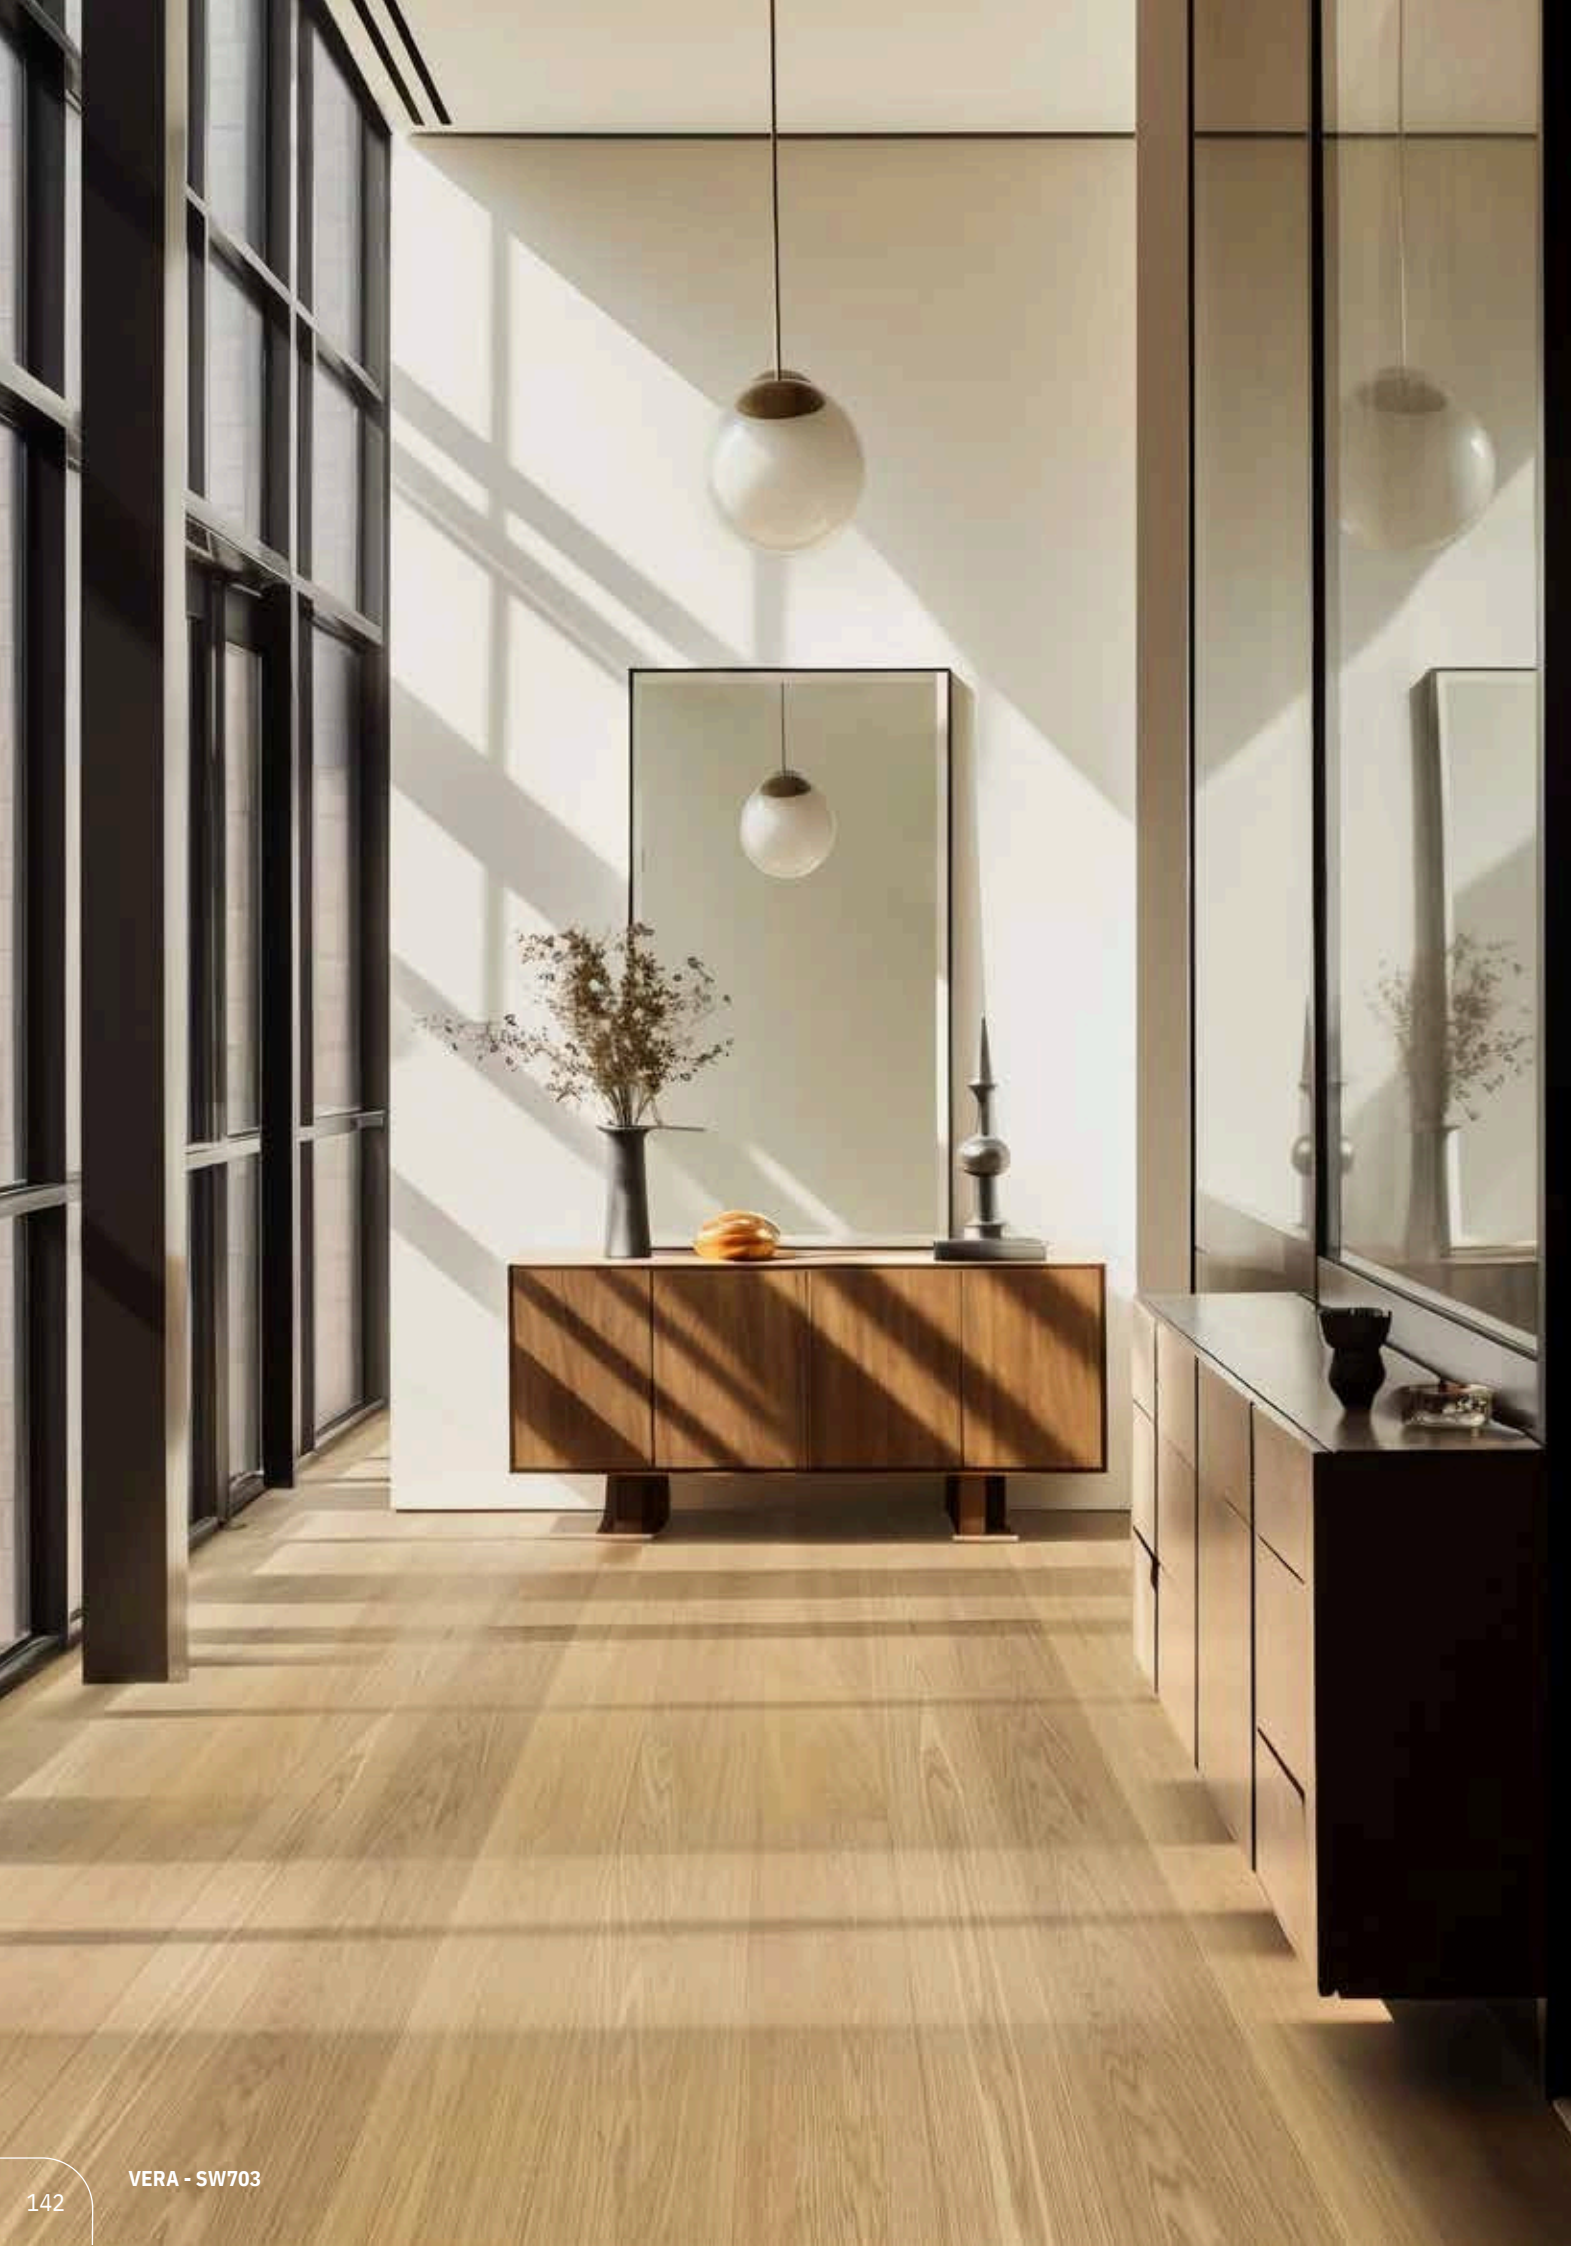


CLOE - SW701

ISTRUZIONI DI MONTAGGIO  
INSTALLATION INSTRUCTION



SPESSORE <i>THICKNESS</i>	7 mm
DIMENSIONI <i>DIMENSIONS</i>	7/1x190x1900mm
MATERASSINO <i>UNDERLAY</i>	Incluso <i>Included</i>
BISELLATURA <i>BEVEL</i>	Micro 4V
INCASTRO <i>INSTALLATION</i>	5G CLICK
RISCALDAMENTO A PAVIMENTO <i>INSTALLATION ON FLOOR HEATING</i>	Adatto <i>Suitable</i>

TIPO DI POSA-INCASTRO  
*INSTALLATION*

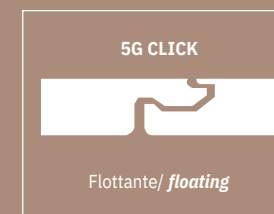

Accessori disponibili a pag. 144  
*Accessories available at page 144*

IMBALLO <i>PACKAGING</i>	KG/M2 - 10 PCS/BOX - 6 M2/BOX - 2,166 M2/PLT - 103,968 PC/PLT - 48/60
-----------------------------	---



**DIMENSIONI / DIMENSIONS**

<b>DIMENSIONI / DIMENSIONS</b>	<b>Lunghezza / length</b>	1900mm	± 1mm
	<b>Larghezza / width</b>	190mm	
	<b>Spessore imp. Legno / veneered wood thickness</b>	1,00mm	± 0,25mm
	<b>Spessore totale / total thickness</b>	7,00mm	
	<b>Spessore pannello SPC / SPC panel thickness</b>	5,00mm	± tolleranze EN 16511:2023 Tabella 1
	<b>Spessore sughero / Cork thickness</b>	1,00mm	
<b>IMBALLO / PACKAGING</b>	6pz/pc 2,166m2/pc 48/pc a bancale o 60/pc a bancale		≤ 16,7% doghe tagliate
<b>PESO/M2 • WEIGHT/M2</b>	ca/ about 12kg/m2		
<b>INCASTRO / CLICK SYSTEM</b>	<b>Lato lungo / long side:</b> click	<b>Lato corto / short side</b> 5G CLICK	
<b>BISELLATURA / BEVEL</b>	<b>Lato lungo / long side:</b> micro 4V	<b>Lato corto / short side:</b> micro 4V	

**ISOLAMENTO ACUSTICO IIC CARATTERISTICHE TECNICHE E COMPOSIZIONE / SOUND INSULATION IIC TECHNICAL CHARACTERISTICS AND COMPOSITION**

<b>Faccia superiore pancia unica</b>	EN 13489	Noce Americano / <b>American Walnut</b>
<b>Classe di aspetto</b>	EN 13489	ABC - UNI Δ

**LAVORAZIONI E FINITURA / WORKING AND FINISHING**

<b>Lavorazione</b>	Leggeremente spazzolato / <b>slightly brushed</b>
<b>Finitura / finishing</b>	Vernice protettiva ad alto traffico con prima mano all'acqua e finitura UV lacquer with water - base first coat and UV finishing for high traffic resistance

**CARATTERISTICHE TECNICHE / TECHNICAL CHARACTERISTICS**

<b>Installazione / installation</b>	Posa flottante/ floating
<b>Tipologia di incastro / click system</b>	5G CLICK
<b>Riscaldamento a pavimento / underfloor heating</b>	Idoneo alla posa con riscaldamento ad acqua <b>suitable for installation on underfloor with water</b>
<b>Classificazione al fuoco / fire classification</b>	Cfls-1
<b>Densità / density</b>	+/- 1590kg/m3
<b>Incollaggio / glue</b>	Adesivo polivinile acetato con acido isocianico esente da formaldeide e da sostanze tossiche <b>Adhesive polyvinyl acetate with isocyanic acid without formaldehyde or toxix substance</b>
<b>Resistenza agli agenti chimici / resistance to staining</b>	Nessuna variazione / <b>no variation</b>
<b>Test della sedia a rotelle / castor chair test</b>	Nessun danneggiamento ≥ 25000 giri / <b>no damage ≥ 25000 cycles</b>
<b>Forza di tenuta alla delaminazione / surface bonding</b>	≥1,87 N/mm² (> Elevato commerciale) / <b>≥1,87 N/mm² (&gt; heavy commercial)</b>
<b>Resistenza Termica / thermal resistance</b>	0,04 m2 K/W
<b>Conduttività Termica / thermal conductivity</b>	0,153 W/mK media / 0,153 W/mK evelage
<b>Assorbimento d'acqua e variazione dimensionale / Water absorption and dimensional variation</b>	Assorbimento 0,58%, aum. Vol. 3,8% / water absorption 0,58%, thickness swel 3,8%
<b>Stabilità dimensionale / dimensional stability</b>	Lunghezza 0,00% Larghez -0,05% / <b>Length direction 0,00% Width direction -0,05%</b>
<b>Isolamento acustico IIC / Impact insulation Class IIC</b>	IIC 59
<b>Classe di trasmissione acustica STC / Sound Transmission Class STC</b>	STC 52
<b>Emissioni di formaldeide / Formaldehyde emissions</b>	E1
<b>Rilascio PCP / PCP release</b>	< 5 ppm
<b>Resistenza termica pavimento / thermal resistance</b>	0,034 mqK/W

**TEST ED EMISSIONI / EMISSIONS TESTS**

<b>VOC Francese</b>	Classe A	
<b>FloorScore®</b>	Indoor Air Quality Certified to SCS-EC10.3-2014 v4.1	Conforms to the CDPH/EHLB St. Method v1.2-2017

